



EXTERIOR & INTERIOR  
LIGHTING  
2024-2025  
.....



EXTERIOR & INTERIOR LIGHTING

2024-2025

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang  
88 Menceng, Cengkareng Jakarta Barat,  
DKI Jakarta 11730  
021-23094422  
@ublix\_lighting  
www.ublix.co.id

# 2024-2025

## CONTENTS

ABOUT UBLIX

UBLIX SHOWROOM

UBLIX WORKSHOP

OUR SERTIFIKAT

PRODUCT INDEX



## About Ublix

**UBLIX** Lighting specialises in the production, design and supply of complete project lighting requirements. was established in 2017 manufacture in Jakarta – Indonesia.

**UBLIX** Lighting works with partners worldwide to bring a complete lighting range to the Indonesian market. We combine this comprehensive and quality product range with exceptional service and support including product support, lighting design, product development and technical information.

**UBLIX** Lighting personnel have extensive technical knowledge and experience in supporting lighting requirements for commercial and industrial projects. We value strong, long-term relationships and strive for customer satisfaction.

### Vision

- Being at the forefront of the lighting industry focusing on consumer experience and striving to improve to be the best.
- Becoming the largest lighting manufacturer in Southeast Asia.

### Mission

- Making customer satisfaction a top priority
- To be at the forefront of offering energy-efficient and cost-effective lighting solutions for a wide range of needs.

### Value

We believe that our values define who we are. They guide our actions, influence the way we work with each other, and the way we serve our clients and the society at large.

- Customer Satisfaction
- People & Environment Orientated
- Commitment & Accountability
- Trust, Integrity & Respect
- Teamwork & Partnership

## UBLIX Showrooms



**DESIGN ROOM**



**LOBBY ROOM**



**DIRECTOR ROOM**



**MEETING ROOM**

## UBLIX Workshop



# OUR CERTIFICATE



Certificate of Brand

Certificate of SNI

Certificate of ISO 9001




Certificate of TKDN

## LED Linear Wall Washer




## LED Spot Light

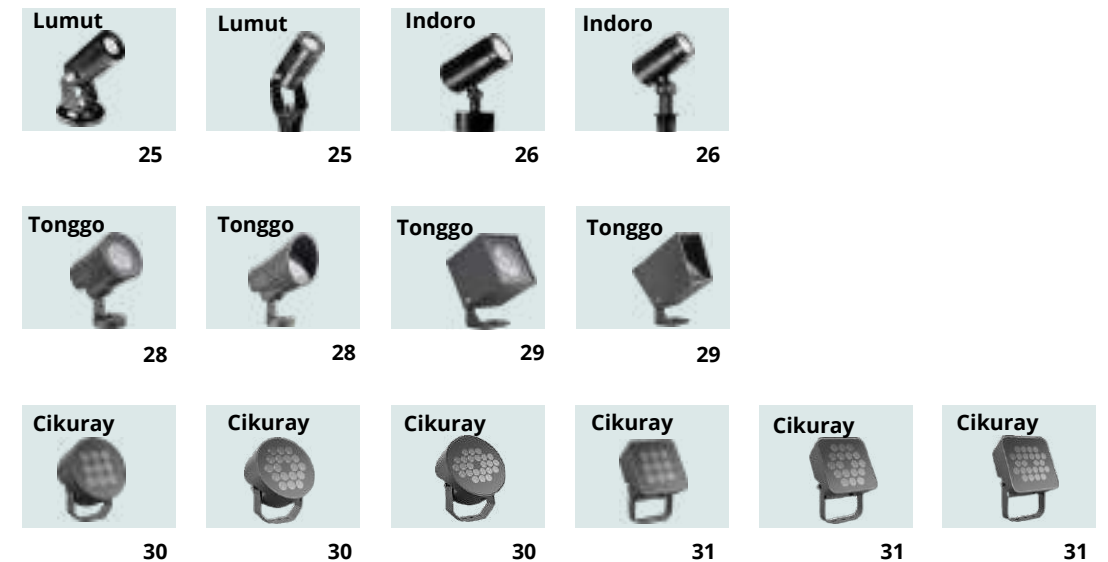

## LED Flood Light



**LED In-Ground Light**

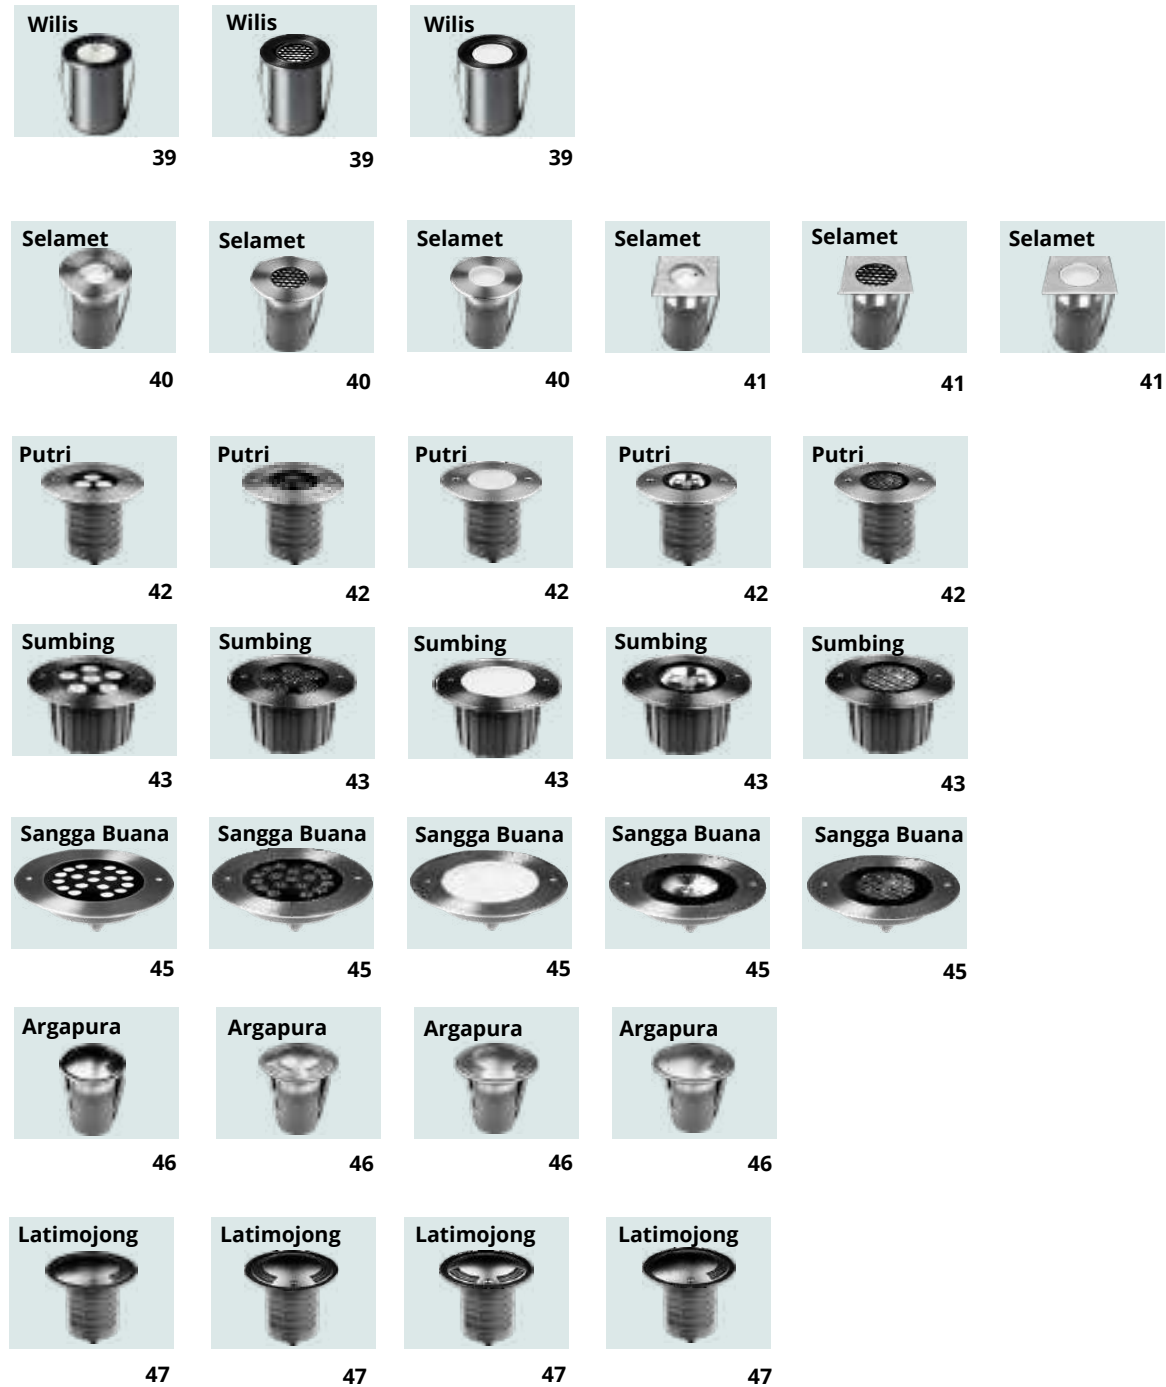

**LED Wall & Star Light**




**LED Bollard Light**




**LED Pixel Light**



**LED High Mast Light**

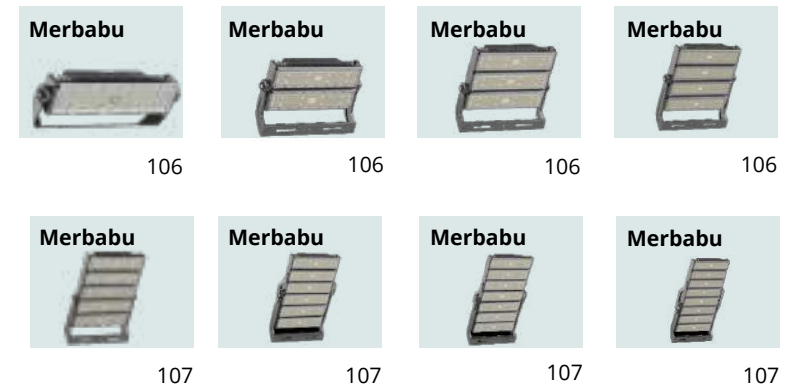

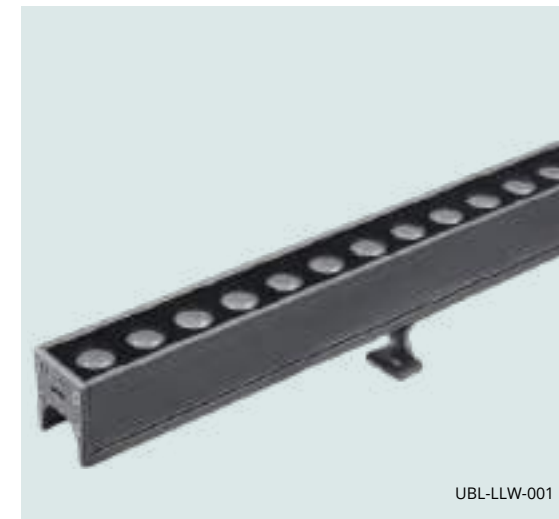

## WAYANG

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




Low voltage input (DC24V) plug type



### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-001	3 Watt	240lm	300mm			
	6 Watt	480lm	500mm			
	12 Watt	960lm	1000mm	35mm	64mm	
UBL-LLW-001-RGB	5 Watt		300mm			
	10 Watt	/	500mm			
	20 Watt		1000mm			

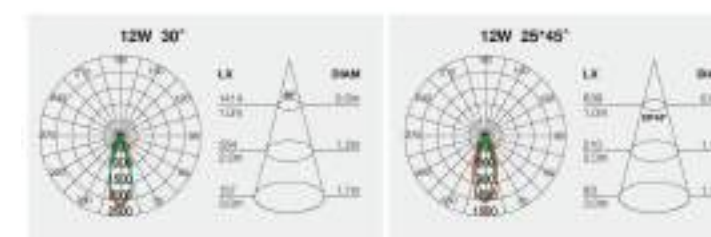

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.





## WAYANG

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




UBL-LLW-002

Low voltage input (DC24V) plug type



### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-002	6 Watt	480lm	300mm			
	8 Watt	640lm	500mm	35mm	64mm	
	18 Watt	1440lm	1000mm			

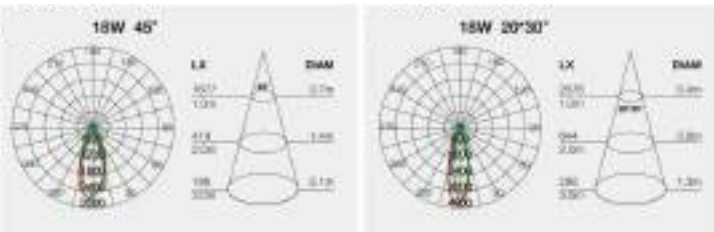

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.



## WAYANG

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




UBL-LLW-003

Low voltage input (DC24V) plug type



Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-003	6 Watt	480lm	300mm			
	12 Watt	960lm	500mm	35mm	64mm	
	24 Watt	1920lm	1000mm			

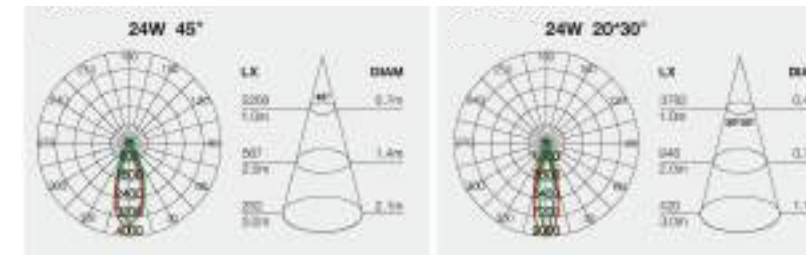

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.

## WAYANG

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




UBL-LLW-004

Low voltage input (DC24V) plug type



### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-004	9 Watt	720lm	300mm	43mm	69mm	
	18 Watt	1440lm	500mm			
	36 Watt	2880lm	1000mm			
UBL-LLW-004-RGBW	9 Watt		300mm			
	18 Watt		500mm			
	24 Watt		1000mm			
	36 Watt					

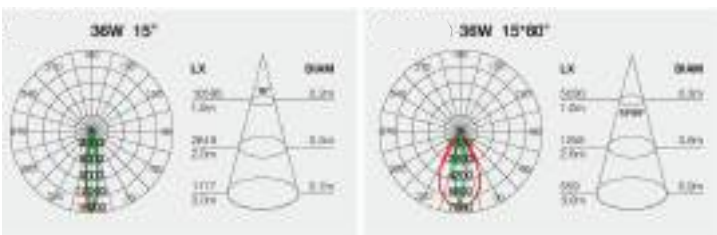

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.



## WAYANG

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




Low voltage input (DC24V) plug type



### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-005	18 Watt	1440lm	300mm	74mm	110mm	
	36 Watt	2880lm	500mm			
	72 Watt	5760lm	1000mm			

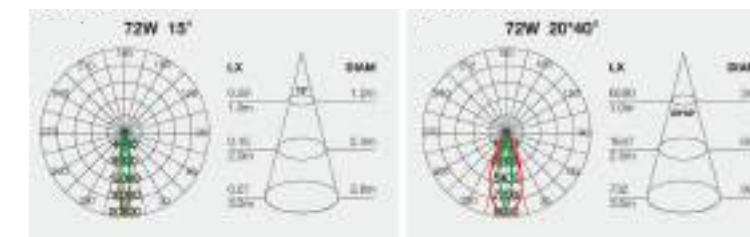

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.




## WAYANG

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-006	6 Watt	420lm	300mm	35mm	64mm	
	9 Watt	720lm	500mm			
	12 Watt	960lm	1000mm			
	18 Watt	1440lm				
	24 Watt	1920lm				

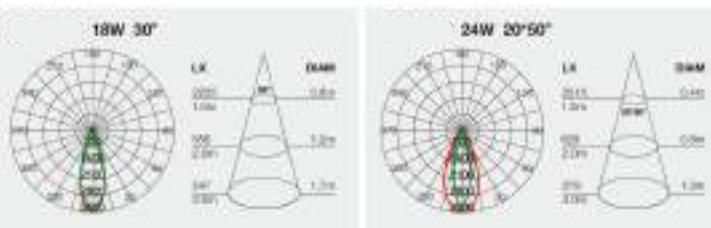

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.

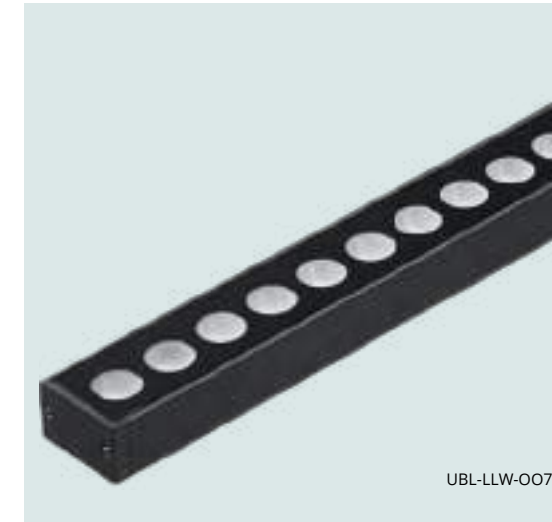


## WAYANG

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-007	9 Watt	720lm	300mm	35mm	64mm	
	18 Watt	1440lm	500mm			
	36 Watt	2880lm	1000mm			
UBL-LLW-007-RGBW	9 Watt		300mm	35mm	64mm	
	18 Watt		500mm			
	36 Watt		1000mm			

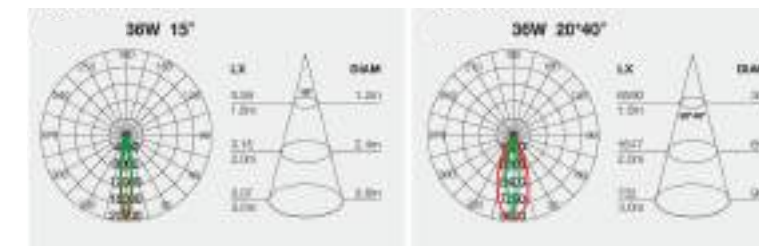

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.



UBL-LLW-008


## TILU

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-008	3 Watt	210lm	300mm	29mm	50mm	
	6 Watt	420lm	500mm			
	12 Watt	840lm	1000mm			
UBL-LLW-008-RGBW	3 Watt		300mm	29mm	50mm	
	6 Watt		500mm			
	15 Watt		1000mm			

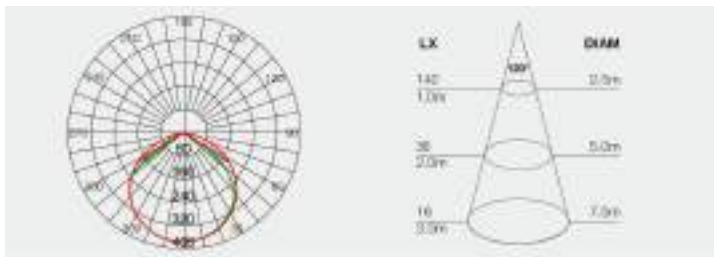

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.



UBL-LLW-009


## TILU

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-009	3 Watt	210lm	300mm	29mm	50mm	
	6 Watt	420lm	500mm			
	12 Watt	840lm	1000mm			
UBL-LLW-009-RGBW	3 Watt		300mm	29mm	50mm	
	6 Watt		500mm			
	15 Watt		1000mm			

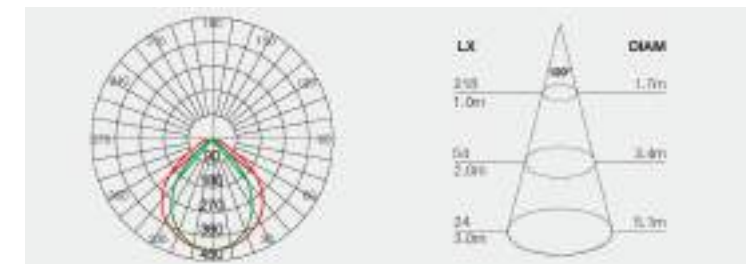

## Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.



UBL-LLW-010


**TILU**

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**Specifications**

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-010	3 Watt	210lm	300mm	28mm	47mm	
	6 Watt	420lm	500mm			
	12 Watt	840lm	1000mm			
UBL-LLW-010-RGBW	3 Watt		300mm	28mm	47mm	
	7 Watt		500mm			
	15 Watt		1000mm			

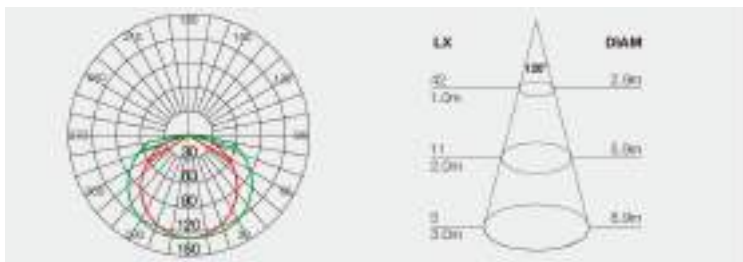

**Application**

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.



UBL-LLW-011


**TILU**

Housing : Extruded aluminum anodized grey  
 Light Window: Tempered glass  
 Input : DC24V  
 LED : OSRAM SMD3030  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> L=0.15m rubber cable (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**Specifications**

Model	Wattage	Lumen	Length	A	B	Line Art
UBL-LLW-011	3 Watt	210lm	300mm	28mm	53mm	
	6 Watt	420lm	500mm			
	12 Watt	840lm	1000mm			
UBL-LLW-011-RGBW	3 Watt		300mm	28mm	53mm	
	7 Watt		500mm			
	15 Watt		1000mm			

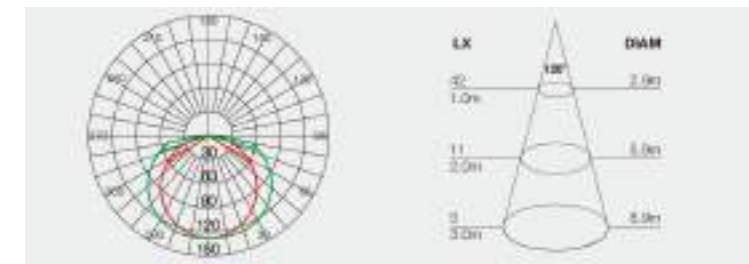

**Application**

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.



## LUMUT


Housing : Die-casting sand black powder coated aluminum  
 Light Window: T empered glass  
 LED : CREE / OSRAM  
 LED Driver : Bulit-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=2m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=2m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=2m (RGBW Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LSL-001-2.5W	2.5 Watt	120lm	60mm	82mm	Φ42mm	
UBL-LSL-001-6W	6 Watt	400lm	60mm	82mm	Φ42mm	
UBL-LSL-001-10W	10 Watt	720lm	60mm	125mm	Φ58mm	
UBL-LSL-001-18W	18 Watt	1150lm	70mm	92mm	Φ68mm	
UBL-LSL-002-2.5W	2.5 Watt	120lm	270mm	82mm	Φ42mm	
UBL-LSL-002-6W	6 Watt	400lm	270mm	82mm	Φ42mm	
UBL-LSL-002-10W	10 Watt	720lm	270mm	125mm	Φ58mm	
UBL-LSL-002-18W	18 Watt	1150lm	280mm	92mm	Φ68mm	

### Accessories option

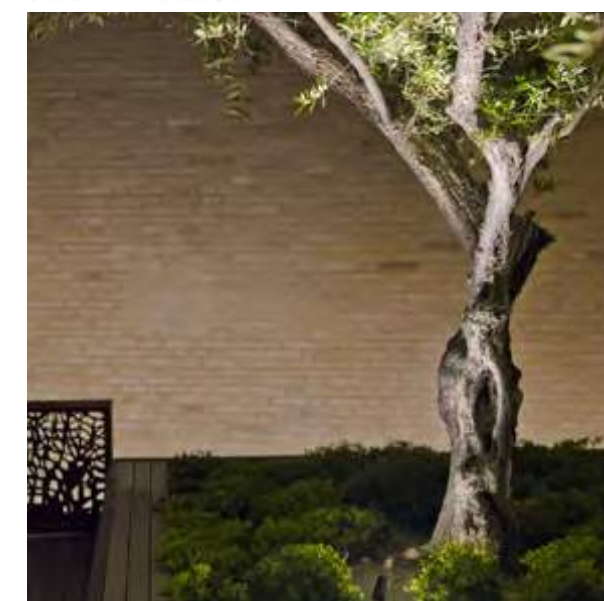

## Application

- Lawns and gardens
- Paths



**INDORO**

Housing : Die-casting sand black powder coated aluminum  
 Light Window: T empered glass  
 LED : CREE COB  
 LED Driver : Bulit-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm² L=2m (Low voltage)  
 H05RN-F 3X1.0mm² L=2m (High voltage)  
 H05RN-F 5X0.5mm² L=2m (RGBW Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**Specifications**

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LSL-003-15W	15 Watt	1150lm 1050lm	47mm	130mm	Φ75mm	
UBL-LSL-003-20W	20 Watt	1500lm 1400lm	47mm	162mm	Φ95mm	
UBL-LSL-003-36W	36 Watt	2750lm 2650lm	49mm	196mm	Φ115mm	
UBL-LSL-004-15W	15 Watt	1150lm 1050lm	256mm	130mm	Φ75mm	
UBL-LSL-004-20W	20 Watt	1500lm 1400lm	256mm	162mm	Φ95mm	
UBL-LSL-004-36W	36 Watt	2750lm 2650lm	256mm	196mm	Φ115mm	



**Application**

- Lawns and gardens
- Paths





## TONGGO

Housing : Die-casting sand grey powder coated aluminum  
 Light Window: T empered glass  
 LED : CREE XHP35  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X1mm<sup>2</sup> L=0.15m (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



## TONGGO

Housing : Die-casting sand grey powder coated aluminum  
 Light Window: T empered glass  
 LED : CREE XHP35  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X1mm<sup>2</sup> L=0.15m (Low voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LSL-005	3 Watt/ 5 Watt	110lm	40mm	88mm	72mm	
UBL-LSL-006					100mm	



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LSL-007	8 Watt	110lm/w	40mm	88mm	72mm	
UBL-LSL-008					100mm	

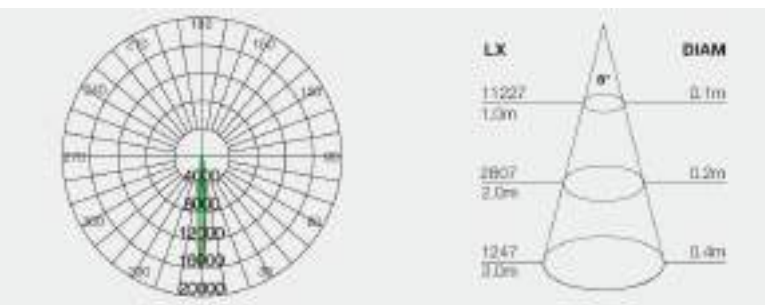

## Application


- Lawns and gardens
- Paths

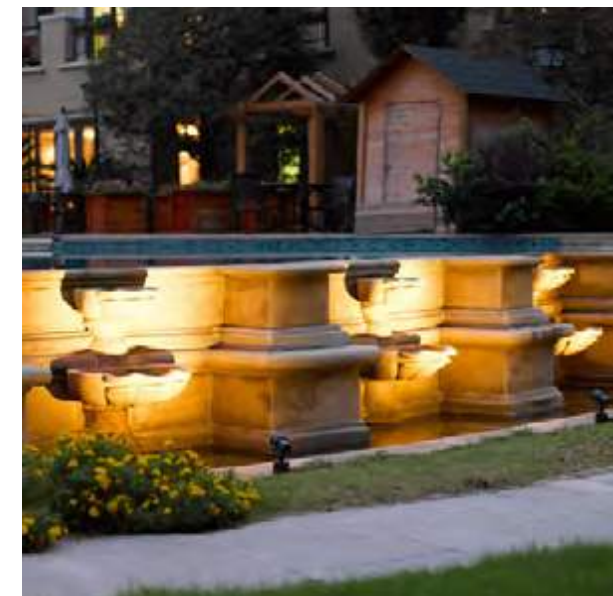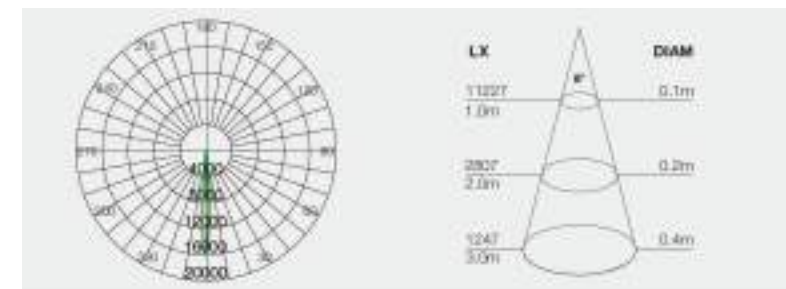

## Application

- Lawns and gardens
- Paths



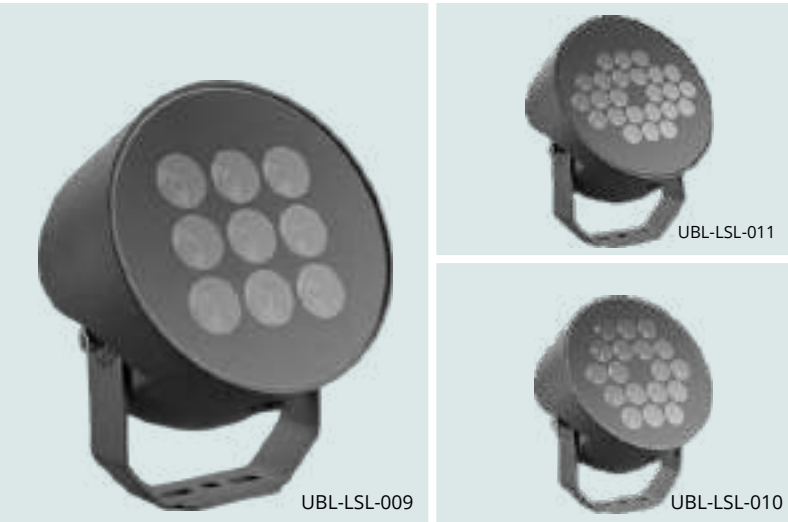

**CIKURAY**

Housing : Die-casting sand grey powder coated aluminum  
 Light Window: T empered glass  
 LED : SMD3535 / SMD3030  
 LED Driver : Bulit-in (High voltage)  
 Power Cable : 2X1mm<sup>2</sup> L=0.15m (Low voltage)  
 3X1mm<sup>2</sup> L=0.15m (High voltage)  
 2X1mm<sup>2</sup> + 3X0.5mm<sup>2</sup> L=0.15m (Low voltage)  
 3X1mm<sup>2</sup> L=0.15m / 4X0.5mm<sup>2</sup> L=0.15m (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**CIKURAY**

Housing : Die-casting sand grey powder coated aluminum  
 Light Window: T empered glass  
 LED : SMD3535 / SMD3030  
 LED Driver : Bulit-in (High voltage)  
 Power Cable : 2X1mm<sup>2</sup> L=0.15m (Low voltage)  
 3X1mm<sup>2</sup> L=0.15m (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90





**Specifications**

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LSL-009	9W/18W/24W		84mm	162mm	134mm	
UBL-LSL-010	36 Watt	110lm/w	84mm	205mm	170mm	
UBL-LSL-011	48 Watt		84mm	162mm	210mm	

**Specifications**

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LSL-012	9W/18W/24W		67mm	183mm	135mm	
UBL-LSL-013	36 Watt	110lm/w	71mm	217mm	260mm	
UBL-LSL-014	48 Watt		88mm	270mm	200mm	

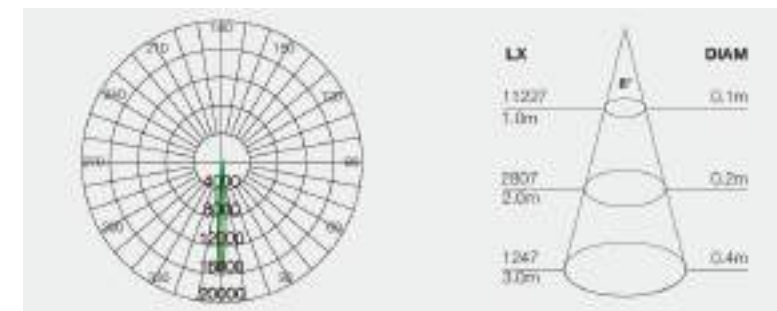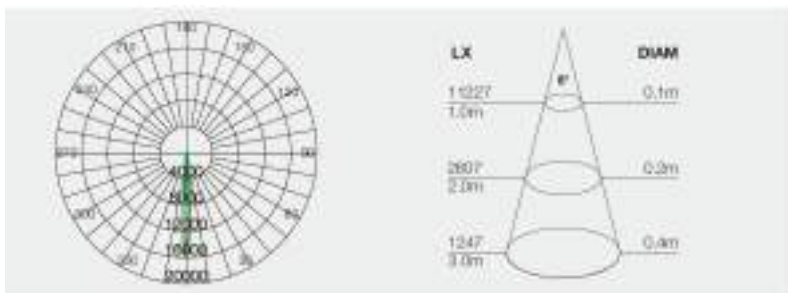

**Application**

- Lawns and gardens
- Paths



**Application**

- Lawns and gardens
- Paths



## SALAK

Housing : Die-casting sand grey powder coated aluminum  
 Light Window: T empered glass  
 LED : SMD3535 / SMD3030  
 LED Driver : Bulit-in (High voltage)  
 Power Cable : 2X1mm<sup>2</sup> L=0.15m (Low voltage)  
 3X1mm<sup>2</sup> L=0.15m (High voltage)  
 2X1mm<sup>2</sup> + 3X0.5mm<sup>2</sup> L=0.15m (Low voltage)  
 3X1mm<sup>2</sup> L=0.15m / 4X0.5mm<sup>2</sup> L=0.15m (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 CRI : 70 - 90



### Installation



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LFL-001	10 Watt	100lm/w	107mm	44mm	148mm	
UBL-LFL-002	20 Watt		147mm	43mm	223mm	
UBL-LFL-003	30 Watt		184mm	47mm	259mm	
UBL-LFL-004	50 Watt		242mm	48mm	330mm	



## Application

- Villa yards, building facade, parks, plaza, and large signboards



**SALAK**

Housing : Die-casting aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : Epistar / Bridgelux  
 Power Factor : 0.95  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.15m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 CRI : 70 - 90



**Installation**



**Specifications**

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LFL-005	100 Watt		285mm	53mm	350mm	
UBL-LFL-006	150 Watt	100lm/w	320mm	58mm	410mm	
UBL-LFL-007	200 Watt		354mm	65mm	465mm	



**Application**

- Villa yards, building facade, parks, plaza, and large signboards





**RAUNG**

Housing : Die-casting aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : Lumileds / OSRAM  
 Power Factor : 0.95  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 CRI : 70 - 90



**RAUNG**

Housing : Die-casting aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : Lumileds / OSRAM  
 Power Factor : 0.95  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 CRI : 70 - 90



**Installation**



**Specifications**

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LFL-008	10 Watt	120lm/w	107mm	44mm	150mm	
UBL-LFL-009	20 Watt		146mm	43mm	223mm	
UBL-LFL-010	30 Watt		184mm	47mm	259mm	
UBL-LFL-011	50 Watt		242mm	48mm	330mm	



**Application**

- Villa yards, building facade, parks, plaza, and large signboards

**Installation**



**Specifications**

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LFL-012	100 Watt	120lm/w	285mm	53mm	350mm	
UBL-LFL-013	150 Watt		320mm	58mm	410mm	
UBL-LFL-014	200 Watt		354mm	65mm	465mm	



**Application**

- Villa yards, building facade, parks, plaza, and large signboards




## WILIS

Housing : Die-casting dark grey powder coated aluminum  
 Front Cover : Stainless steel SUS 316L  
 Light Window: Tempered glass  
 LED : CREE / OSRAM  
 LED Driver : Built-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-IGL-001		100lm				
UBL-IGL-001A	1.5 Watt		Ø35mm	Ø27mm	42mm	
UBL-IGL-001B		70lm				
UBL-IGL-002		150lm				
UBL-IGL-002A	2.3 Watt		Ø50mm	Ø36mm	51mm	
UBL-IGL-002B		100lm				

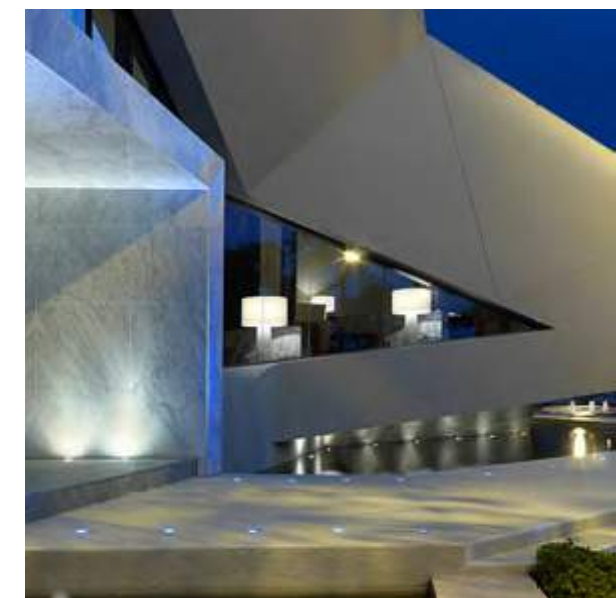

## Application

- Villa yards, building facade, parks, plaza, and large signboards

## SELAMET

Housing : Die-casting dark grey powder coated aluminum  
 Front Cover : Stainless steel SUS 316L  
 Light Window: Tempered glass  
 LED : CREE / OSRAM  
 LED Driver : Built-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-LGL-003



UBL-LGL-003B



UBL-LGL-003A

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LGL-003	2.3 Watt	150lm	Ø58mm	Ø42mm	77mm	
UBL-LGL-003A		100lm				
UBL-LGL-003B		100lm				
UBL-LGL-004	5 Watt	300lm				
UBL-LGL-004A		260lm				
UBL-LGL-004A		260lm				



### Application


- Villa yards, building facade, parks, plaza, and large signboards



UBL-LGL-003C



UBL-LGL-003CB



UBL-LGL-003CA

## SELAMET

Housing : Die-casting dark grey powder coated aluminum  
 Front Cover : Stainless steel SUS 316L  
 Light Window: Tempered glass  
 LED : CREE / OSRAM  
 LED Driver : Built-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LGL-003C	2.3 Watt	150lm	58*58mm	Ø42mm	77mm	
UBL-LGL-003CA		100lm				
UBL-LGL-003CB		100lm				



### Application

- Hotels, villas, shopping malls, venues, airports, subway exits, parks, and plaza.



## PUTRI

HHousing : Die-casting dark grey powder coated aluminum  
 Front Cover : Stainless steel SUS 316L  
 Light Window: Tempered glass  
 LED : CREE / OSRAM  
 LED Driver : Bult-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



## SUMBING

Front Cover : Stainless steel SUS 316L  
 Light Window: Tempered glass  
 LED : CREE / OSRAM  
 LED Driver : Bult-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LGL-005	6 Watt	350lm	Ø166mm	Ø68mm	78mm	
UBL-LGL-005A		300lm				
UBL-LGL-005B	9 Watt	600lm				
UBL-LGL-005C						
UBL-LGL-005C-A						



## Application

- Hotels, villas, shopping malls, venues, airports, subway exits, parks, and plaza.


### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LGL-006	12 Watt	800lm	Ø160mm	Ø103mm	80mm	
UBL-LGL-006A		700lm				
UBL-LGL-006B	16 Watt	1050lm				
UBL-LGL-006C						
UBL-LGL-006C-A						



## Application

- Hotels, villas, shopping malls, venues, airports, subway exits, parks, and plaza.

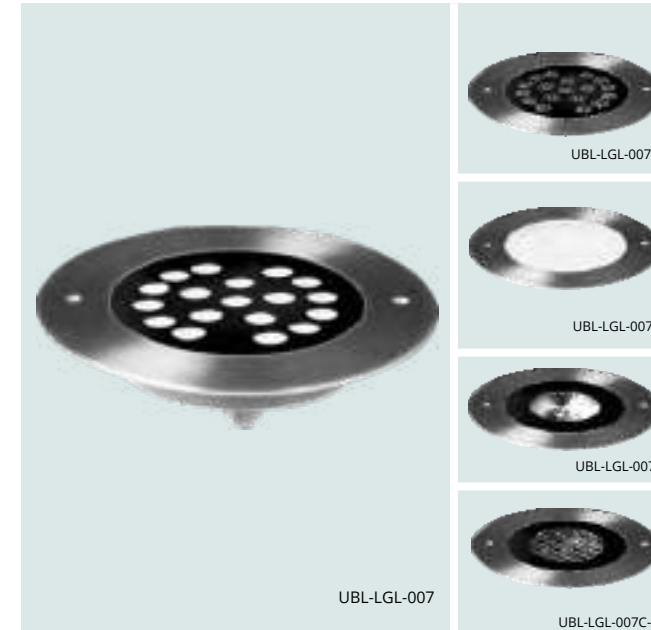

## SANGGA BUANA

Housing : Die-casting dark grey powder coated aluminum  
 Front Cover : Stainless steel SUS 316L  
 Light Window: Tempered glass  
 LED : CREE / OSRAM  
 LED Driver : Bult-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LGL-007	30 Watt	1850lm				
UBL-LGL-007A						
UBL-LGL-007B		1800lm	Ø250mm	Ø170mm	52mm	
UBL-LGL-007C		1900lm				
UBL-LGL-007C-A						



## Application

- Hotels, villas, shopping malls, venues, airports, subway exits, parks, and plaza.





## ARGAPURA

Housing : Die-casting dark grey powder coated aluminum  
 Front Cover : Stainless steel SUS 316L  
 Light Window: PC milky diffuser  
 LED : CREE / OSRAM  
 LED Driver : Bult-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-LGL-009-1						
UBL-LGL-009-2	3 Watt	75lm	Ø58mm	Ø42mm	52mm	
UBL-LGL-009-4						



## Application

- Hotels, villas, shopping malls, venues, airports, subway exits, parks, and plaza.



## LATIMOJONG

FHousing : Die-casting dark grey powder coated aluminum  
 Front Cover : Stainless steel SUS 316L  
 Light Window: PC milky diffuser  
 LED : CREE / OSRAM  
 LED Driver : Bult-in (High voltage)  
 Power Cable : H05RN-F 2X1.0mm<sup>2</sup> L=0.55m (Low voltage)  
 H05RN-F 3X1.0mm<sup>2</sup> L=0.55m (High voltage)  
 H05RN-F 5X0.5mm<sup>2</sup> L=0.55m (RGBW Low voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-191-010-1						
UBL-191-010-2	9 Watt	230lm	Ø116mm	Ø68mm	94mm	
UBL-191-010-4						



## Application

- Hotels, villas, shopping malls, venues, airports, subway exits, parks, and plaza.




## PATUHA

Housing : Die-casting sand silver or sand black powder coated aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : CREE / OSRAM  
 LED Driver : Built-in  
 Power Cable : H05RN-F 3X1.0mm<sup>2</sup> L=0.2m (High voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-001	2.5 Watt	150lm	80mm	48mm	60mm	
UBL-WSL-002						

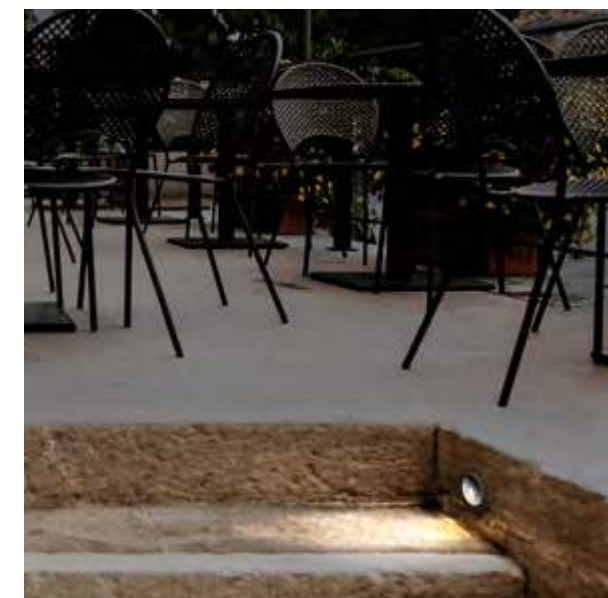


## Application

- Hotels, villas, shopping malls, venues, airports, subway exits, parks, and plaza.



## PATUHA

Housing : Die-casting sand silver or sand black powder coated aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : CREE / OSRAM  
 LED Driver : Built-in  
 Power Cable : H05RN-F 3X1.0mm<sup>2</sup> L=0.2m (High voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90

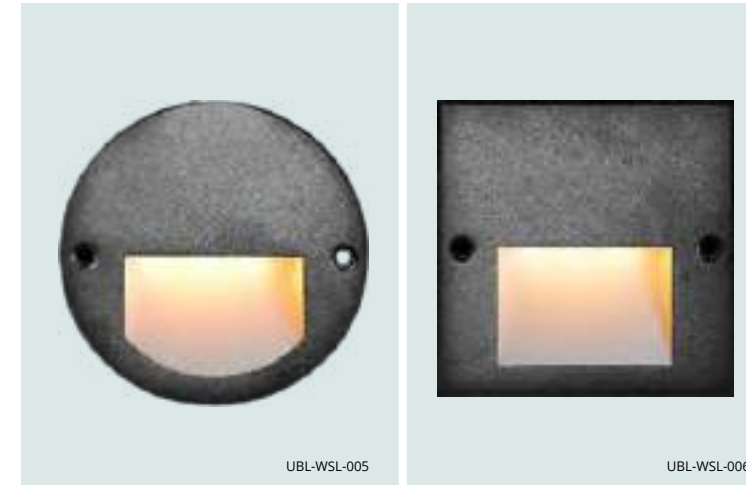

## PATUHA

Housing : Die-casting sand silver or sand black powder coated aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : CREE / OSRAM  
 LED Driver : Built-in  
 Power Cable : H05RN-F 3X1.0mm<sup>2</sup> L=0.2m (High voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-003	2.5 Watt	150lm	80mm	48mm	60mm	
UBL-WSL-004						

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-005	1.5 Watt	90lm	80mm	48mm	60mm	
UBL-WSL-006						

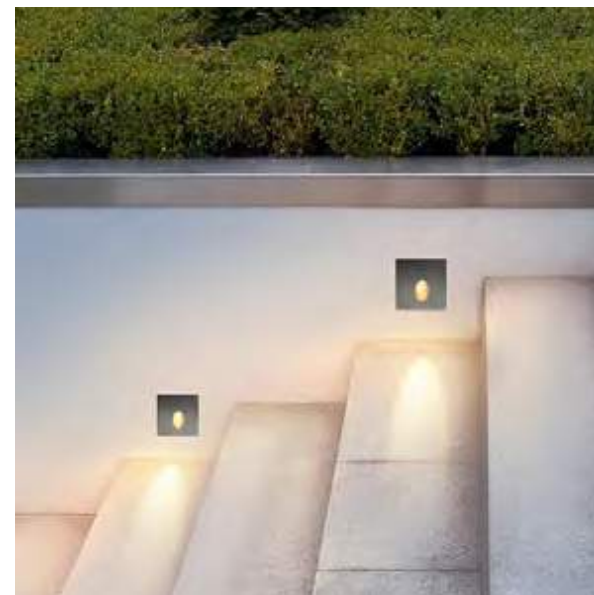

## Application

- Hotels, villas, parks, plaza, and building facade.




## Application

- Hotels, villas, parks, plaza, and building facade.



## IJEN

Housing : Die-casting sand black powder coated aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : CREE / OSRAM  
 LED Driver : Built-in  
 Power Cable : H05RN-F 3X1.0mm<sup>2</sup> L=0.2m (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90

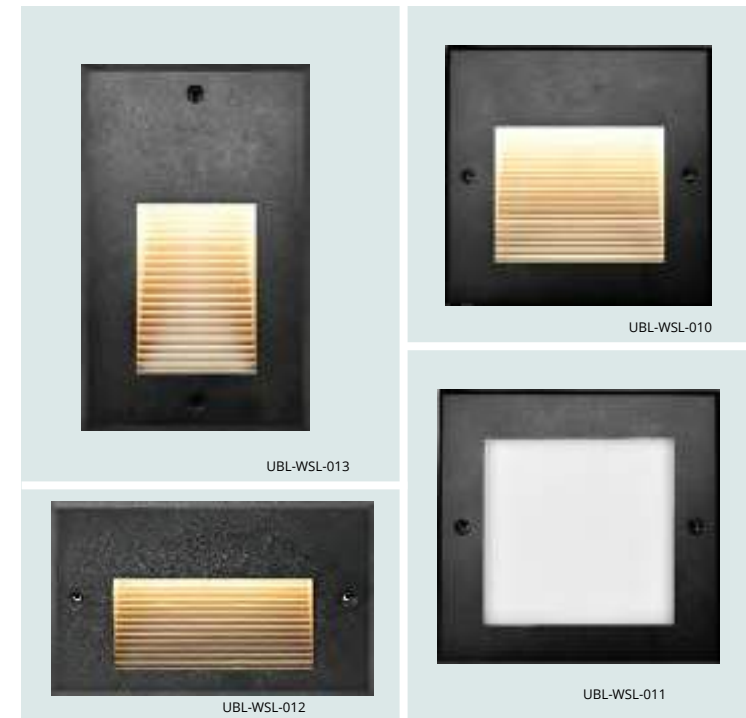

## LAWIT

Housing : Die-casting sand silver or sand black powder coated aluminum  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : CREE / OSRAM  
 LED Driver : Built-in  
 Power Cable : H05RN-F 3X1.0mm<sup>2</sup> L=0.2m (High voltage)  
 Sleeve : ABS Plastic  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-007			160mm	36mm	160mm	
UBL-WSL-008	6 Watt	350lm	160mm	36mm	160mm	
UBL-WSL-009			200mm	36mm	90mm	



## Application

- Hotels, villas, parks, plaza, and building facade.

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-010	2.5 Watt	150lm	171mm	65mm	106mm	
UBL-WSL-011			106mm	65mm	171mm	
UBL-WSL-012	3 Watt	170lm	120mm	75mm	120mm	
UBL-WSL-012-M	6 Watt	350lm				
UBL-WSL-013	6 Watt	320lm	160mm	65mm	160mm	
UBL-WSL-013M		350lm				



## Application

- Hotels, villas, parks, plaza, and building facade.



UBL-WSL-014



UBL-WSL-015



UBL-WSL-016


## PONIKI

Housing : Die-casting aluminum silver grey powder coated  
 Light Window: Anti-UV frosted PC  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-014	2 Watt	169lm	114mm			
UBL-WSL-015	4 Watt	327lm	170mm	65mm	114mm	
UBL-WSL-016	6 Watt	455lm	226mm			

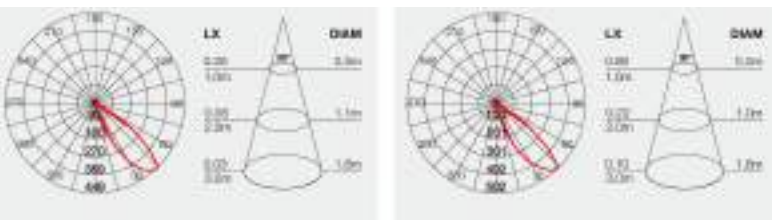

## Application

- Hotels, villas, parks, plaza, and building facade.




UBL-WSL-017



UBL-WSL-018

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-017	3 Watt	8lm	66mm	73mm	171mm	
UBL-WSL-018		101lm				

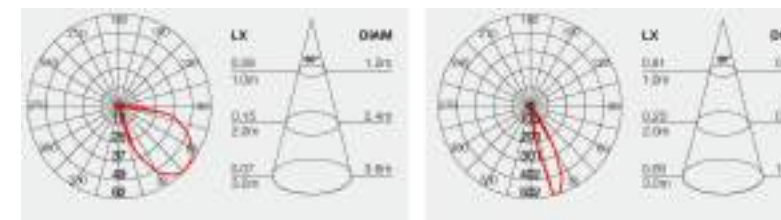

## CATUR

Housing : Die-casting aluminum silver grey powder coated  
 Light Window: Clear glass  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.45m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



## Application

- Hotels, villas, parks, plaza, and building facade.



## BATUR

Housing : Die-casting aluminum silver grey powder coated  
 Light Window: Clear glass  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 Power Factor : 0.53  
 LED Driver : Built-in  
 Power Cable : 3X1.0mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



## AGUNG

Housing : Extruded aluminum silver grey powder coated  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 LED Driver : Built-in  
 Power Cable : 3X1.0mm<sup>2</sup> L=0.2m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-019	4*1 Watt	321lm	100mm	100mm	52mm	
UBL-WSL-020						

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-021	2*4 Watt	715lm	Ø80mm	122mm	200mm	
UBL-WSL-021-A	2*6 Watt	900lm	Ø90mm	132mm	220mm	
UBL-WSL-021-B	2*12 Watt	1900lm	Ø108mm	156mm	260mm	
UBL-WSL-021-C	2*15 Watt	2850lm	Ø145mm	195mm	310mm	

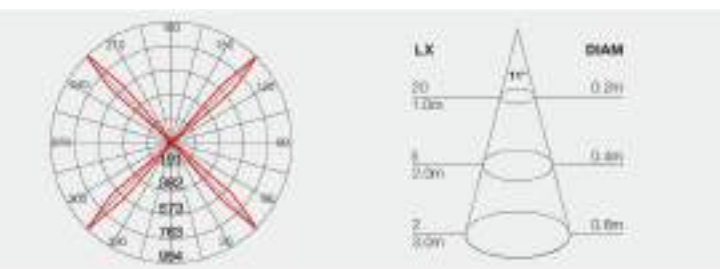

## Application

- Hotels, villas, parks, plaza, and building facade.



## Application

- Hotels, villas, parks, plaza, and building facade.

## SINDAKA

Housing : Die-casting aluminum silver grey powder coated  
 Light Window: Anti-UV frosted PC  
 Input : 220-240V 50/60Hz  
 LED : OSRAM  
 LED Driver : Built-in  
 Power Cable : 3X1.0mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-WSL-022

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-022	8 Watt	820lm	Ø240mm	280mm	290mm	



## Application

- Hotels, villas, parks, plaza, and building facade.



UBL-WSL-023

## SINDAKA

Housing : Die-casting aluminum silver grey powder coated  
 Light Window: Opal PC  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 LED Driver : Built-in  
 Power Cable : 3X1.0mm<sup>2</sup> L=0.45m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-023	8 Watt	560lm	Ø210mm	265mm	280mm	



## Application


- Hotels, villas, parks, plaza, and building facade.



UBL-WSL-024

## TRIKORA


Housing : Die-casting aluminum dark grey and white powder coated  
 Light Window: Frost glass  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 LED Driver : Built-in  
 Power Cable : 3X1.0mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



CBL7512 (Dark Grey) CBL7513 (White) Operating Temperature

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-024	15 Watt	752lm	200mm	92mm	200mm	
UBL-WSL-025	7 Watt	377lm				

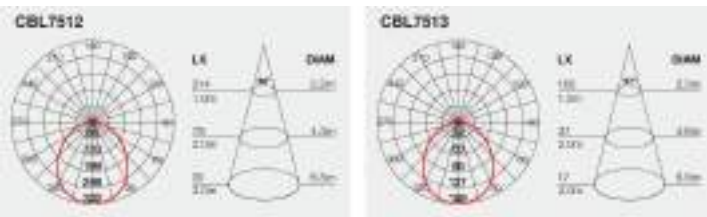

## Application

- Hotels, villas, parks, plaza, and building facade.



UBL-WSL-025

## TRIKORA


Housing : Die-casting aluminum dark grey and white powder coated  
 Light Window: Frost glass  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



CBL7514 (Dark Grey) CBL7514 (White) Operating Temperature

### Specifications


Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-025	2*7 Watt	990lm	120mm	64mm	240mm	

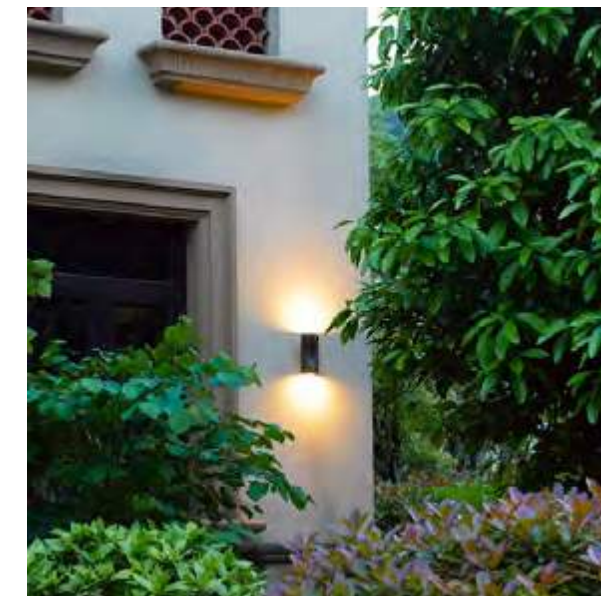

## Application

- Hotels, villas, parks, plaza, and building facade.



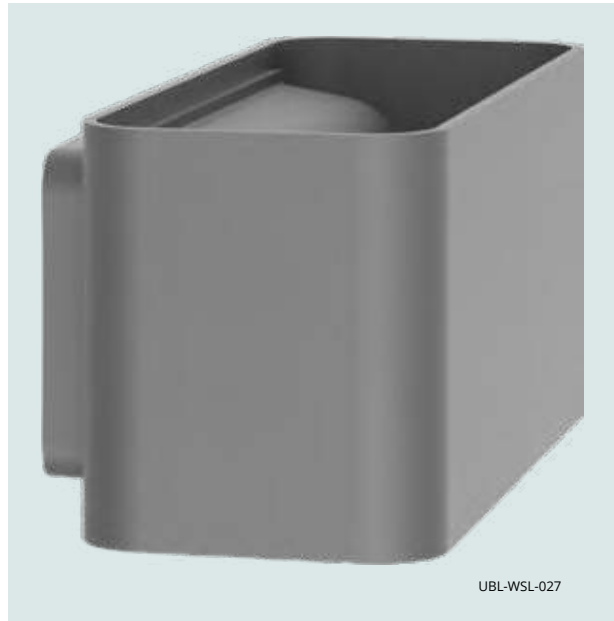

## TIKUNG

Housing : Extruded aluminum silver grey powder coated  
 Light Window: Tempered glass  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 LED Driver : Built-in  
 Power Cable : 3X1.0mm<sup>2</sup> L=0.2m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



## SANGGAR

Housing : Die-casting aluminum  
 Light Window: Opal PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.89  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-027	2*6 Watt	800lm	180mm	84mm	84mm	




## Application

- Hotels, villas, parks, plaza, and building facade.

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-028	18 Watt	450lm	250mm	103mm	110mm	
UBL-WSL-029		466lm		108mm		

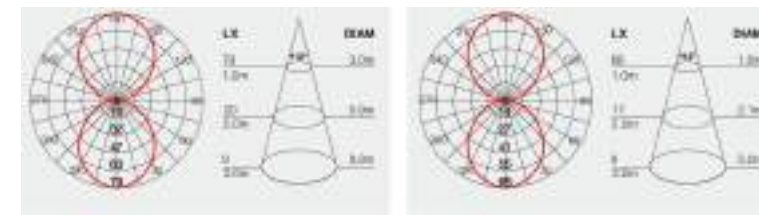

## Application

- Hotels, villas, parks, plaza, and building facade.



### PERKISON


Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Frost PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-WSL-030

#### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-030	7 Watt	457lm	280mm	84mm	110mm	

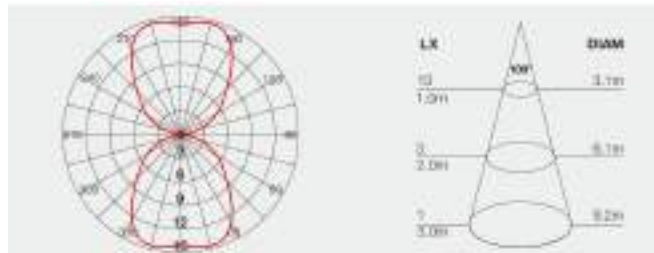

### Application

- Hotels, villas, parks, plaza, and building facade.



### LEUSEUR

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Frost PC  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 Power Factor : 0.92  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




UBL-WSL-031



#### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-031	10 Watt	547lm	175mm	65mm	185mm	

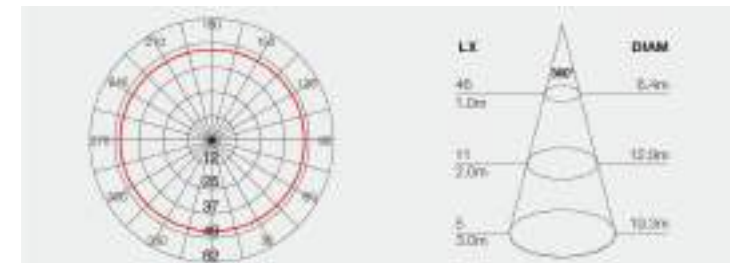

### Application

- Hotels, villas, parks, plaza, and building facade.

## SAGIYANG

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Frost PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-WSL-032

## SAGIYANG


Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Frost PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-WSL-033

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-032	7 Watt	448lm	220mm	130mm	55mm	

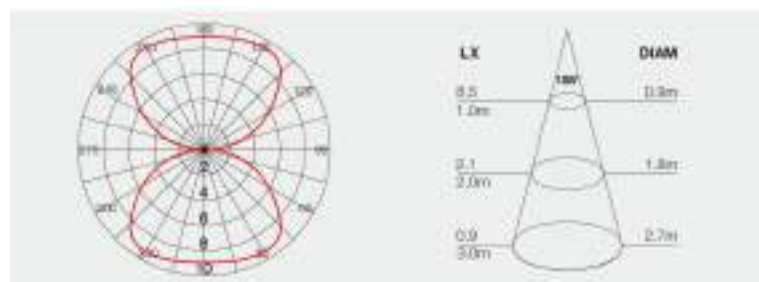


### Application

- Hotels, villas, parks, plaza, and building facade.

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-033	7 Watt	290lm	120mm	175mm	140mm	

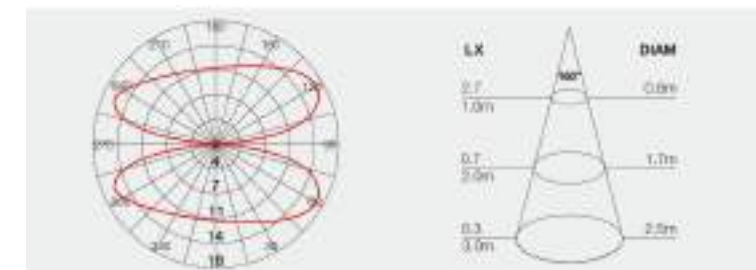


### Application

- Hotels, villas, parks, plaza, and building facade.



## BRATAN


Housing : Die-casting aluminum silver grey powder coated  
 Light Window: Clear glass  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-WSL-034

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-034	7 Watt	353lm	160mm	108mm	108mm	

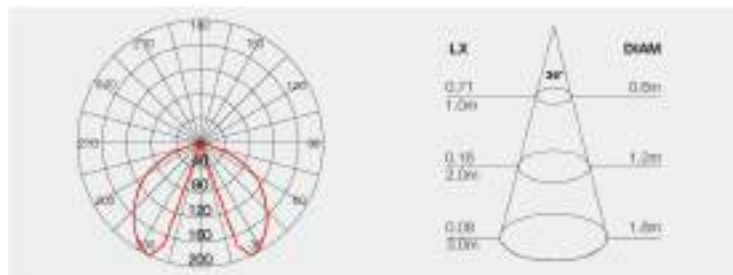

## Application

- Hotels, villas, parks, plaza, and building facade.



## MUNARA


Housing : Die-casting aluminum rusty powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.92  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-WSL-033

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-033	15 Watt	568lm	Ø120mm	181mm	260mm	

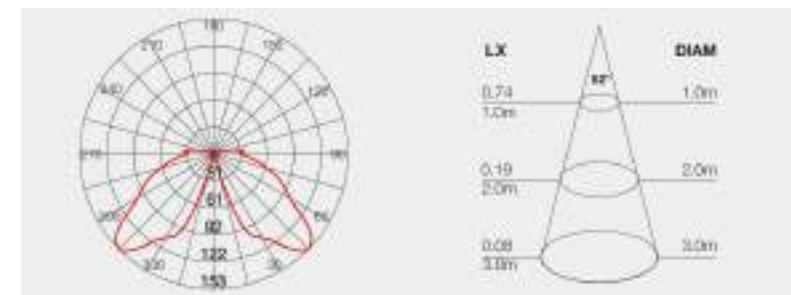


## Application

- Hotels, villas, parks, plaza, and building facade.



## MUNARA

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.88  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90





## JAYA WIJAYA

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.89  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-036	15 Watt	423lm	90mm	127mm	240mm	

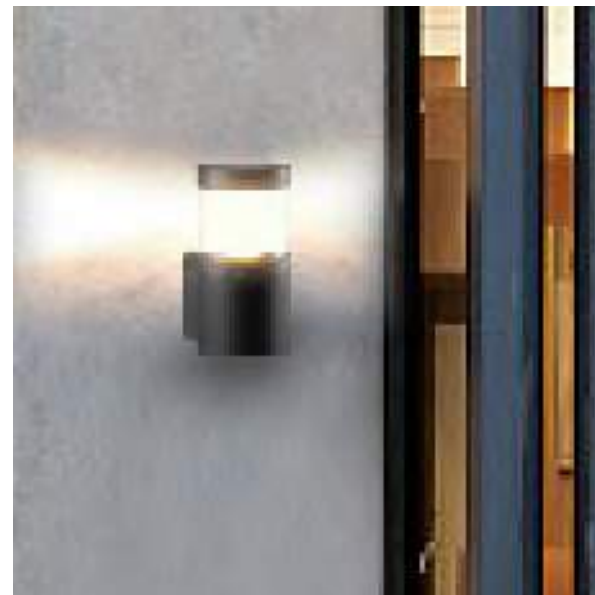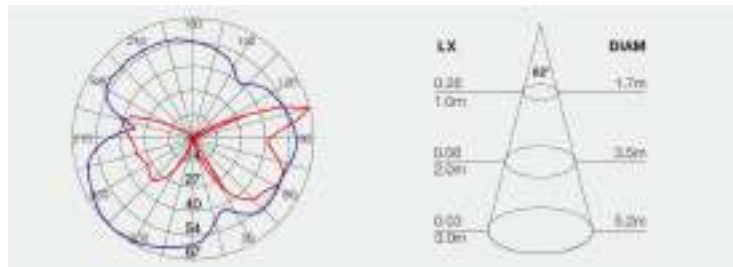


### Application

- Hotels, villas, parks, plaza, and building facade.

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-036	9 Watt	370lm	110mm	148mm	250mm	

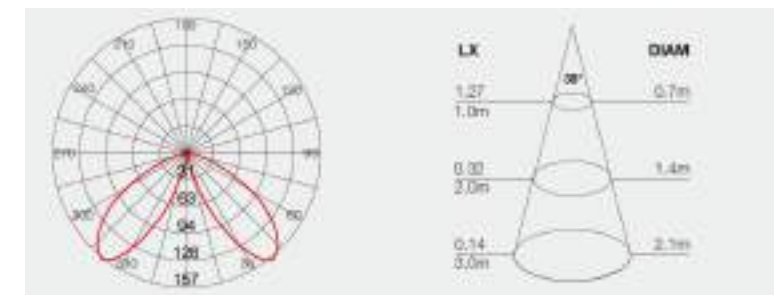

### Application

- Hotels, villas, parks, plaza, and building facade.



## PANGRANGO

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.5  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




## BULUTUMBU

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.5  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-037	7 Watt	555lm	Ø165mm	222mm	282mm	

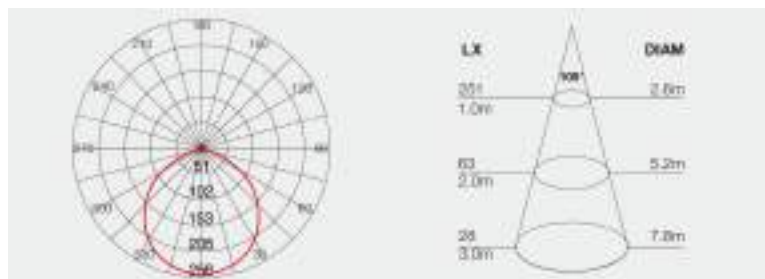


### Application

- Hotels, villas, parks, plaza, and building facade.

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-WSL-038	3 Watt	68lm	175mm	65mm	85mm	

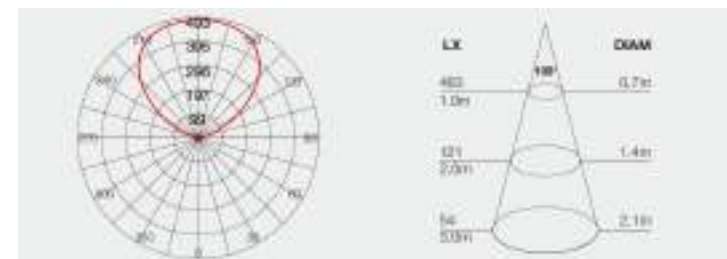

### Application

- Hotels, villas, parks, plaza, and building facade.




**DEMP0**

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Frost PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**Specifications**

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-001	7 Watt	290lm	120mm	40mm	350mm	
UBL-BLL-002					650mm	

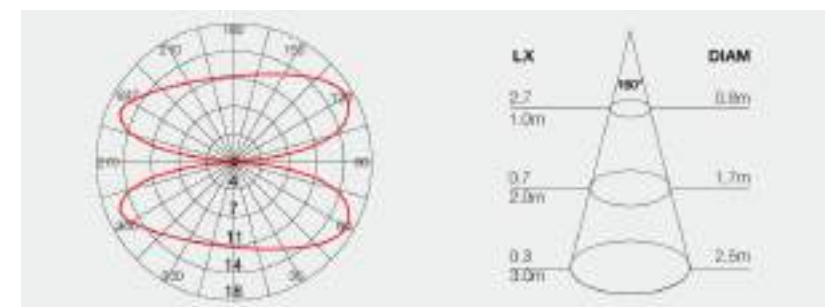

**Application**

-Hotels, villas, parks, outdoor gardens and plaza.

## TALANGI

Housing : Die-casting aluminum rusty powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.92  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-BLL-003






UBL-BLL-004



### Specifications

Model	Wattage	Lumen	A	B	Line Art
UBL-BLL-003	15 Watt	568lm	Ø120mm	265mm	
UBL-BLL-004				650mm	

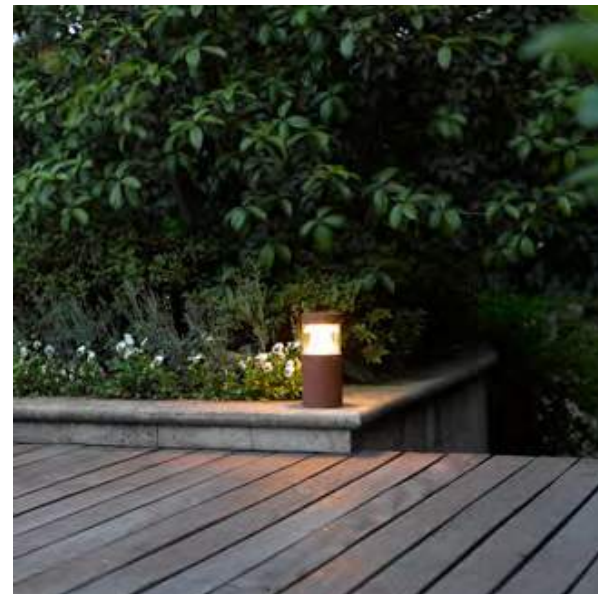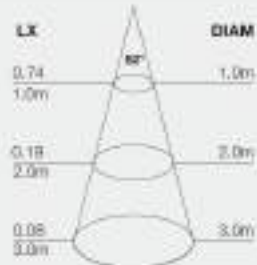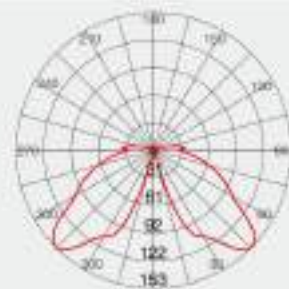

### Application

-Hotels, villas, parks, outdoor gardens and plaza.



UBL-BLL-005

UBL-BLL-006


## TALANGI

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.88  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	Line Art
UBL-BLL-005	15 Watt	423lm	Ø120	265mm	
UBL-BLL-006				650mm	

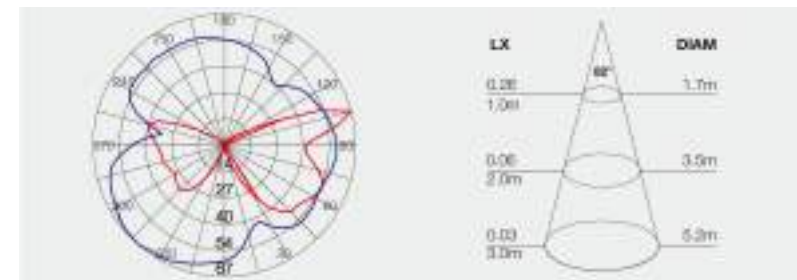

### Application

-Hotels, villas, parks, outdoor gardens and plaza.





UBL-BLL-007



UBL-BLL-008


## RINJANI

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-007	9 Watt	370lm	110mm	110mm	250mm	
UBL-BLL-008					650mm	

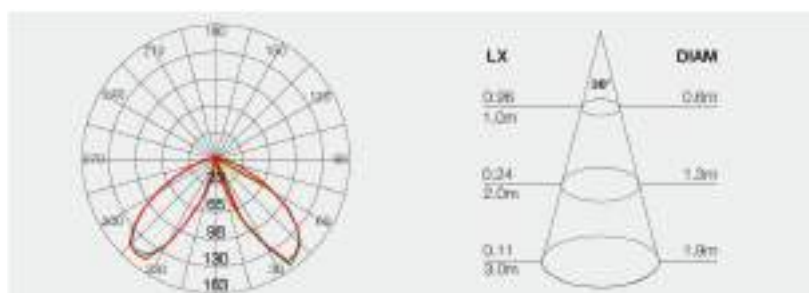

## Application

-Hotels, villas, parks, outdoor gardens and plaza.



UBL-BLL-009



## SEMERU

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.5  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-009	7 Watt	565lm	Ø165mm	120mm	650mm	

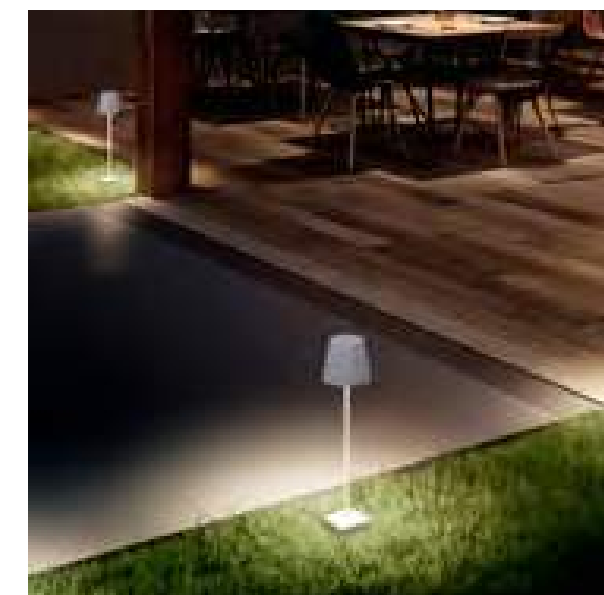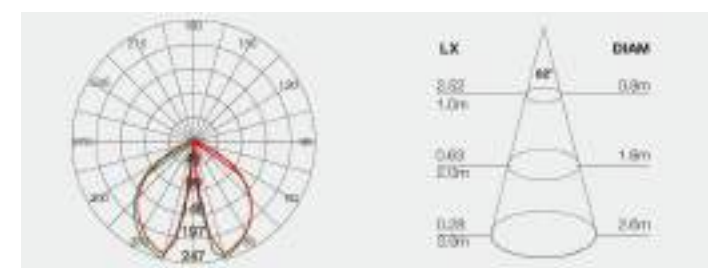

## Application

-Hotels, villas, parks, outdoor gardens and plaza.



## BAAYAN

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Opal PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.99  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




## SOMBANG

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear glass  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C1	C2	Line Art
UBL-BLL-010	18 Watt	930lm	Ø200mm	Ø50mm	250mm	900mm	

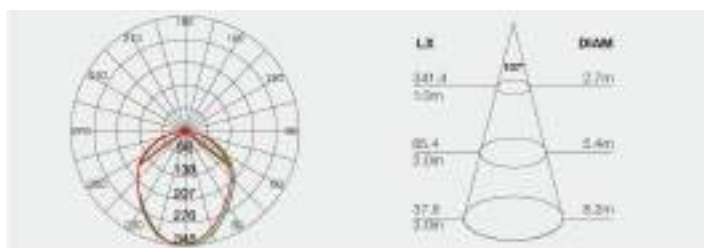


## Application

-Hotels, villas, parks, outdoor gardens and plaza.

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-012	18 Watt	278lm	127mm	100mm	650mm	

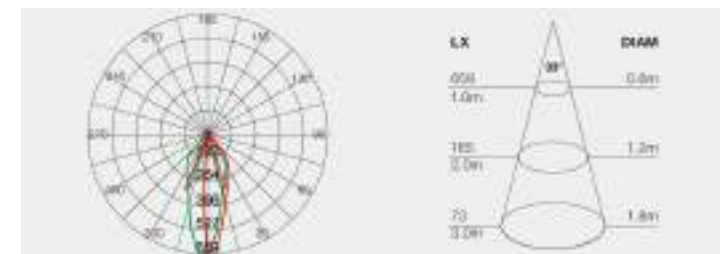

## Application

-Hotels, villas, parks, outdoor gardens and plaza.

## BITEA

Housing : Die-casting aluminum silver grey powder coated  
 Light Window: Clear glass  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-BLL-013

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-013	7 Watt	400lm	108mm	108mm	200mm	



### Application

-Hotels, villas, parks, outdoor gardens and plaza.

## BROMO


Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Opal PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.93  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-BLL-014

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-014	18 Watt	737lm	220mm	220mm	245mm	

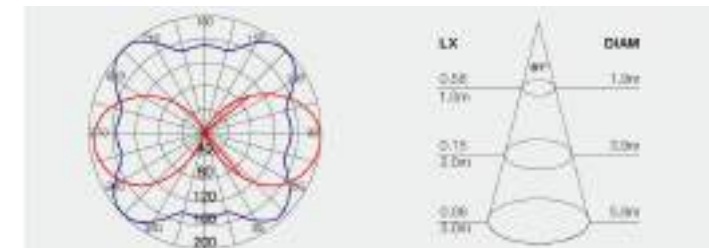

### Application

-Hotels, villas, parks, outdoor gardens and plaza.





### GEDE

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.53  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



#### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-015	4 Watt	317lm	Ø90mm	171mm	400mm	
UBL-BLL-016					650mm	

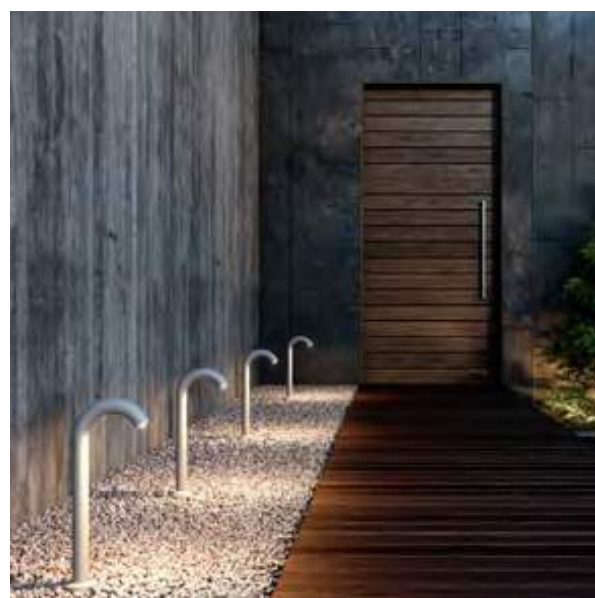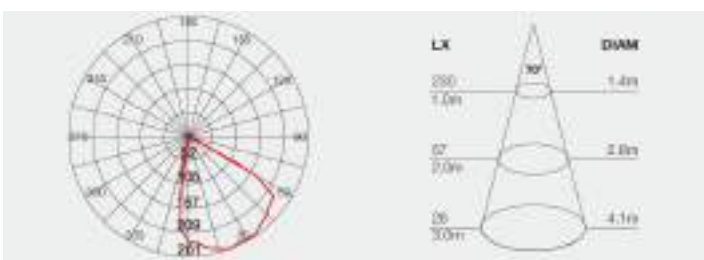

### Application

-Hotels, villas, parks, outdoor gardens and plaza.




### GUNTUR

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear PC  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



#### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-017	7 Watt	159lm	70mm	120mm	250mm	
UBL-BLL-018					650mm	

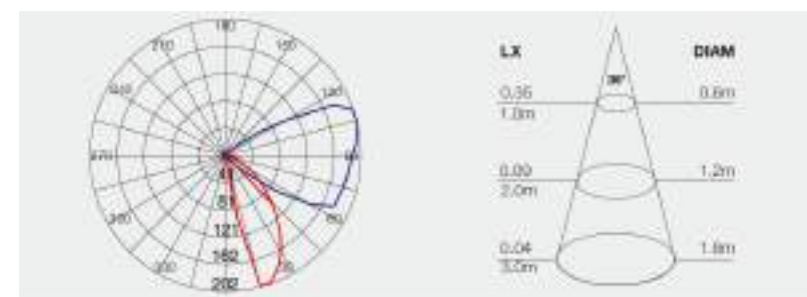

### Application

-Hotels, villas, parks, outdoor gardens and plaza.



UBL-BLL-019



## PELATANG

Housing : Die-casting aluminum rusty powder coated  
 Light Window: Convex glass  
 Input : 220-240V 50/60Hz  
 LED : CREE COB  
 Power Factor : 0.89  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-019	7 Watt	1442lm	108mm	108mm	650mm	

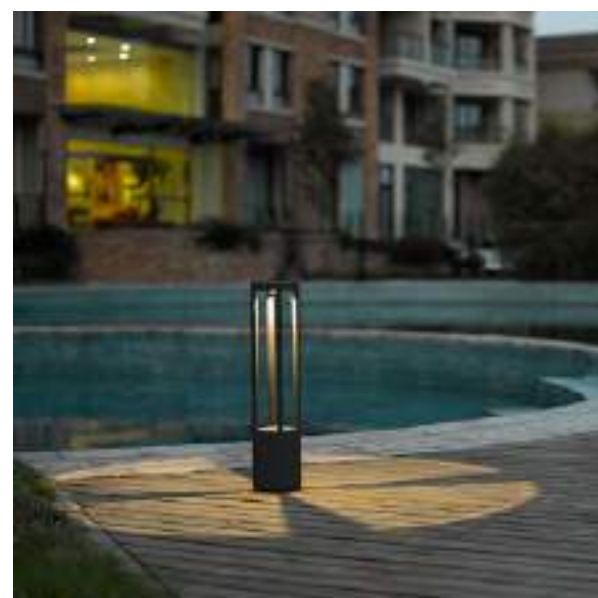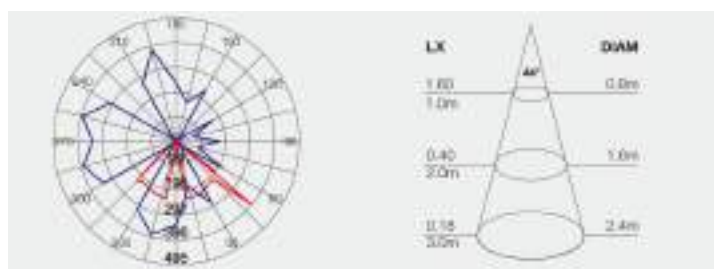

## Application

-Hotels, villas, parks, outdoor gardens and plaza.



UBL-BLL-020


## PELATANG

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Clear glass  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.9  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-BLL-020	7 Watt	858lm	141mm	141mm	1650mm	

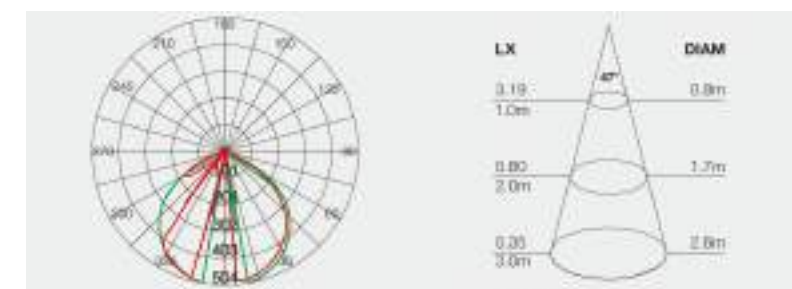

## Application

-Hotels, villas, parks, outdoor gardens and plaza.




## TORE NALI

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Frost PC  
 Input : 220-240V 50/60Hz  
 LED : CREE  
 Power Factor : 0.92  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	Line Art
UBL-BLL-020	10 Watt	480lm	Φ210mm	220mm	
UBL-BLL-021				750mm	

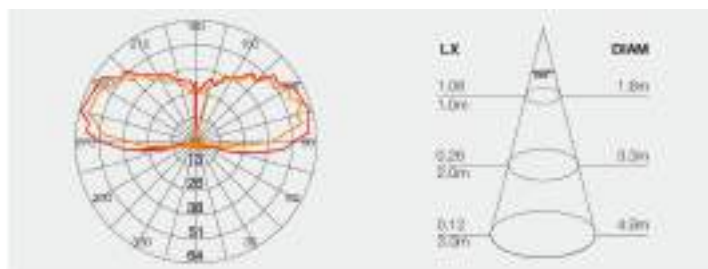

## Application

-Hotels, villas, parks, outdoor gardens and plaza.




## TANGKUBAN PERAHU

Housing : Die-casting aluminum dark grey powder coated  
 Light Window: Opal PC  
 Input : 220-240V 50/60Hz  
 LED : SMD  
 Power Factor : 0.5  
 LED Driver : Built-in  
 Power Cable : 3X0.75mm<sup>2</sup> L=0.35m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	Lumen	A	B	Line Art
UBL-BLL-023	3 Watt	190lm	Φ100mm	465mm	

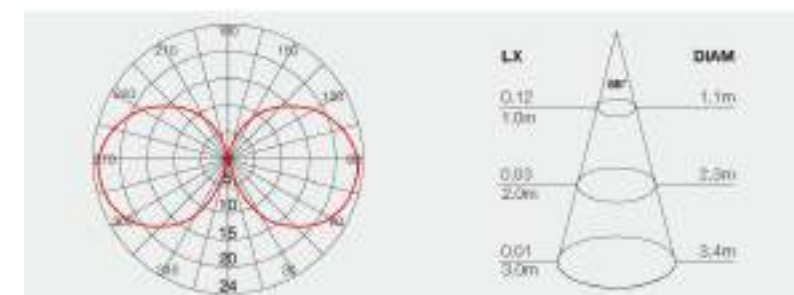

## Application

- Used as a socket ( European )  
 - Hotels, villas, parks, outdoor gardens and plaza.



## KERINCI

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC12V  
 LEDs QTY : 2 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC12V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




UBL-PXL-001

### Specifications


Model	Wattage	A	B	C	Line Art
UBL-PXL-001	0.6 Watt	22mm	22mm	14mm	

### Installation Diagram Options

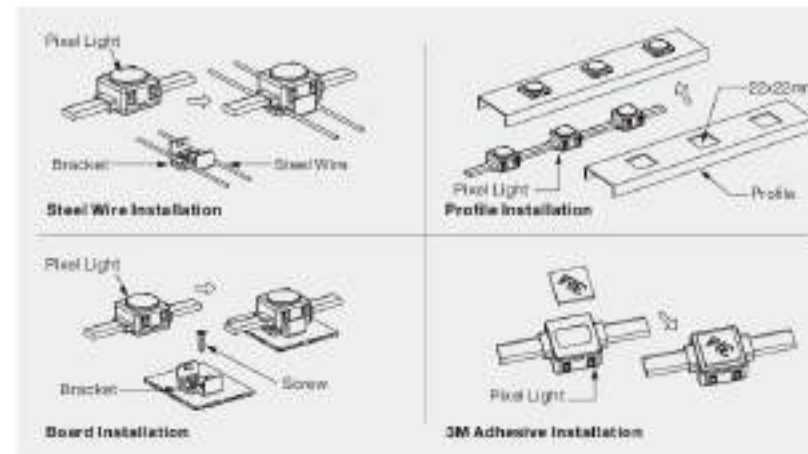

## Application

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.

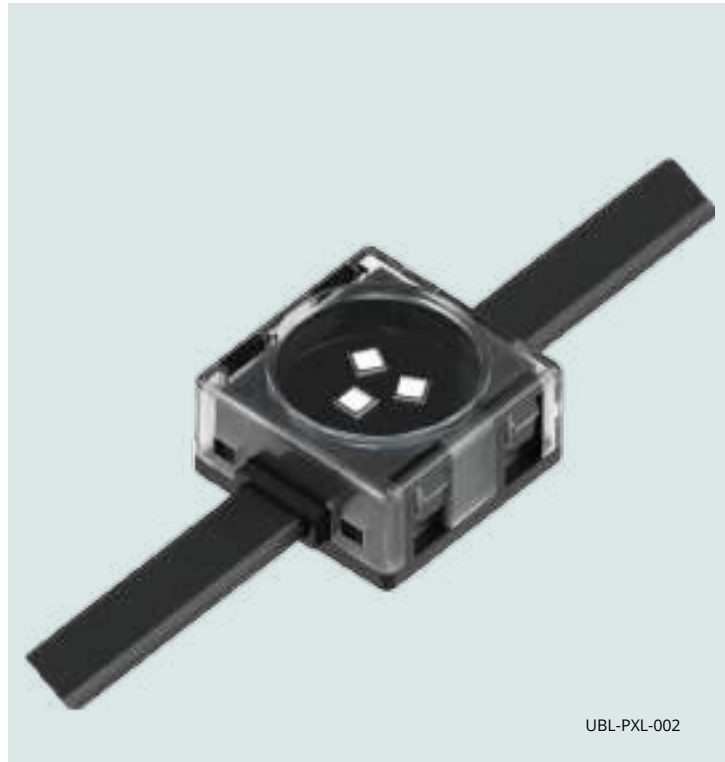

UBL-PXL-002

**KERINCI**

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC12V  
 LEDs QTY : 3 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C-60°C  
 LED Driver : DC12V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-PXL-003

**KERINCI**

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC12V  
 LEDs QTY : 3 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C-60°C  
 LED Driver : DC12V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**Specifications**

Model	Wattage	A	B	C	Line Art
UBL-PXL-002	0.6 Watt	22mm	22mm	14mm	




**Application**

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.

Model	Wattage	A	B	C	Line Art
UBL-PXL-003	0.7 Watt 0.9 Watt	190mm	95mm	800mm	

**Installation Diagram Options**

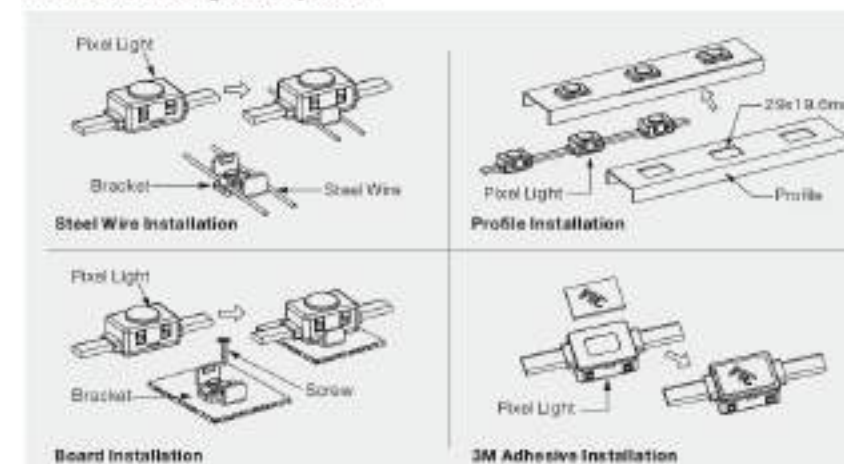

**Application**

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.





## KERINCI


Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC12V  
 LEDs QTY : 3 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC12V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	A	B	C	Line Art
UBL-PXL-004	0.7 Watt 0.9 Watt	33mm	33mm	15mm	

### Installation Diagram Options

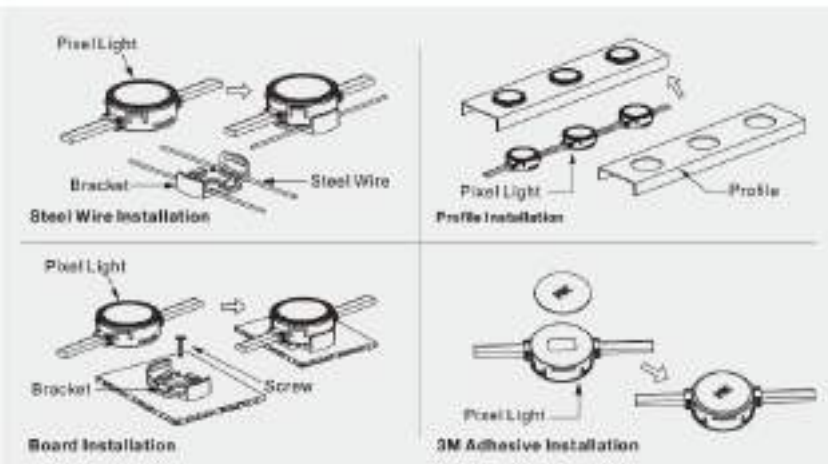

## Application

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.





UBL-PXL-005

### KERINCI

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 9 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-PXL-006

### KERINCI


Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 8 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	A	B	C	Line Art
UBL-PXL-005A	1.5 Watt	55mm	36mm	15mm	
UBL-PXL-005B	1.85 Watt				

### Installation Diagram Options

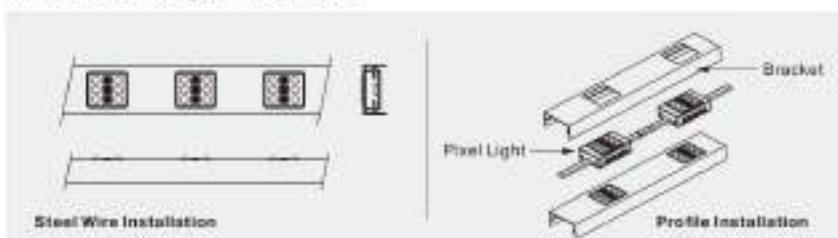


### Application

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.

### Specifications

Model	Wattage	A	B	C	Line Art
UBL-PXL-006	1.4 Watt	45mm	45mm	17mm	
	1.8 Watt				

### Installation Diagram Options

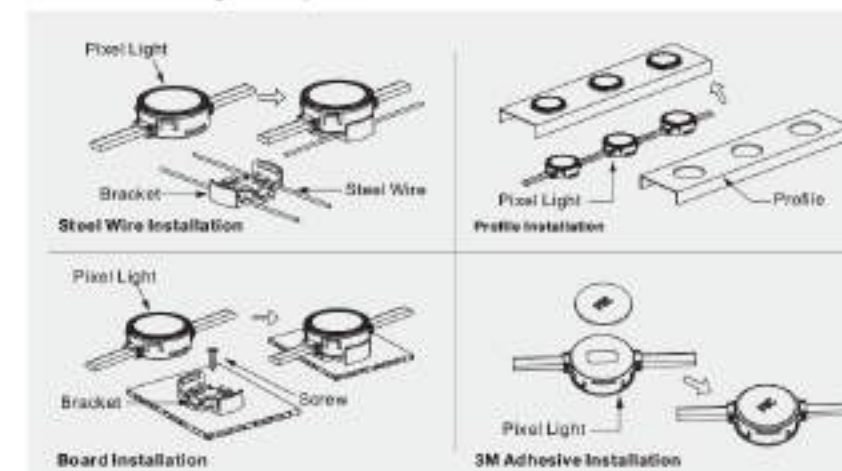

### Application

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.



UBL-PXL-007

### KERINCI


Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 12 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	A	B	C	Line Art
UBL-PXL-007	2.4 Watt	60mm	60mm	17mm	
	3 Watt				

### Installation Diagram Options

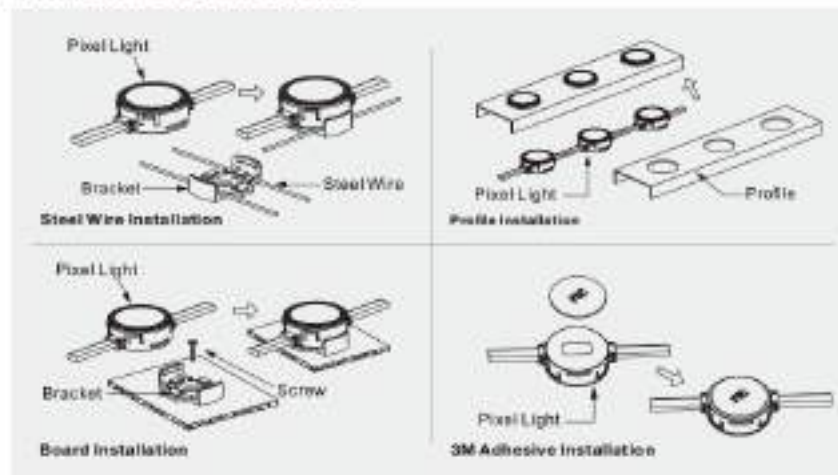

### Application

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.



UBL-PXL-008

### KERINCI



Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 8 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Specifications

Model	Wattage	A	B	C	Line Art
UBL-PXL-008	1.4 Watt	42mm	42mm	16mm	
	1.8 Watt				

### Installation Diagram Options

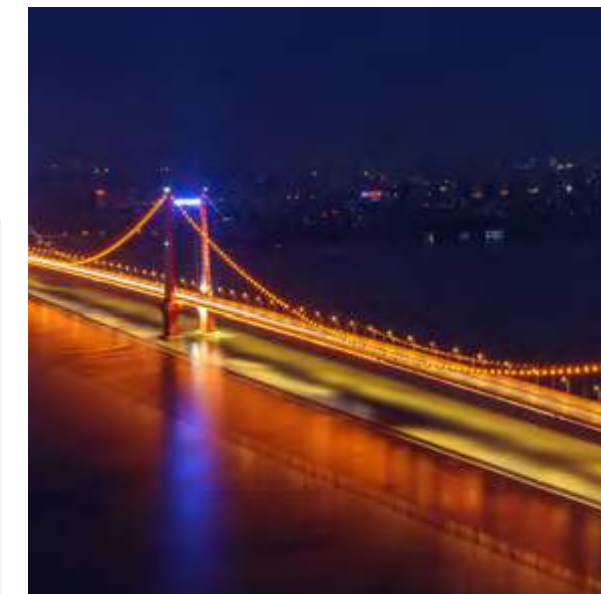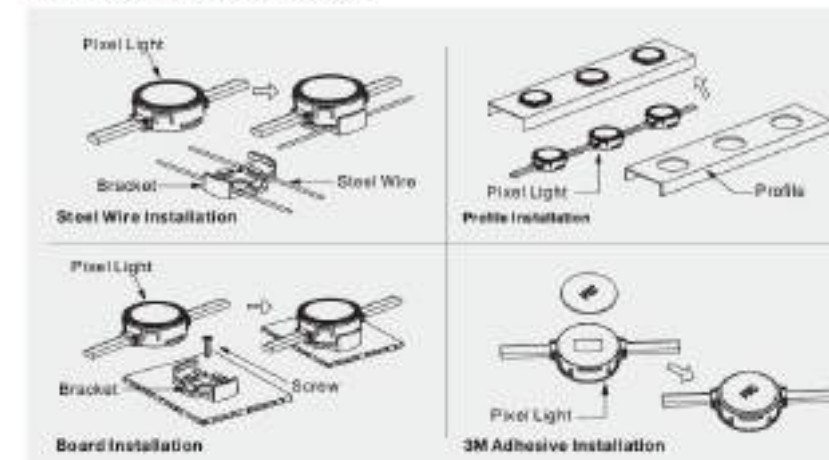

### Application

- Large urban landscape lighting for hotels, parks, etc.
- Decorative lighting for high-rise building and bridge.



### KERINCI

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 16 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-PXL-010



### KERINCI

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 14 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-PXL-011


### Specifications

Model	Wattage	A	B	C	Line Art
UBL-PXL-010	2.4 Watt	65mm	65mm	15mm	
	3 Watt				

### Specifications

Model	Wattage	A	B	C	Line Art
UBL-PXL-011	2.4 Watt	55mm	45mm	16mm	
	3 Watt				


### Installation Diagram Options

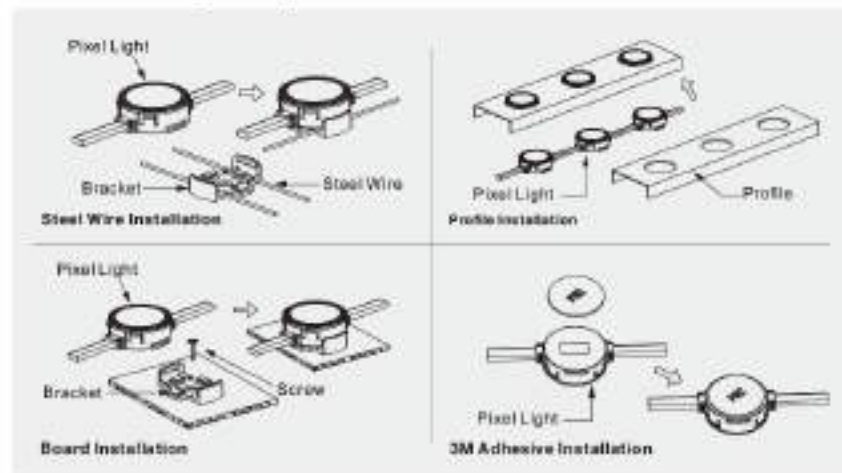

### Application


- Large urban landscape lighting for hotels, parks.etc.
- Decorative lighting for high-rise building and bridge.

### Installation Diagram Options

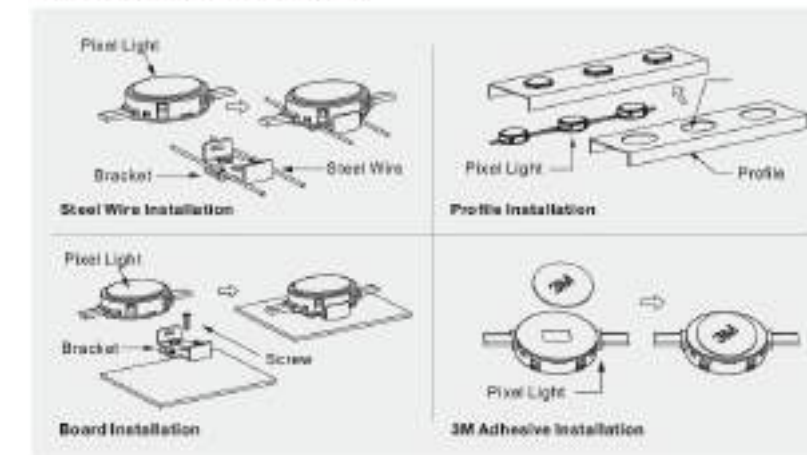

### Application

- Large urban landscape lighting for hotels, parks.etc.
- Decorative lighting for high-rise building and bridge.

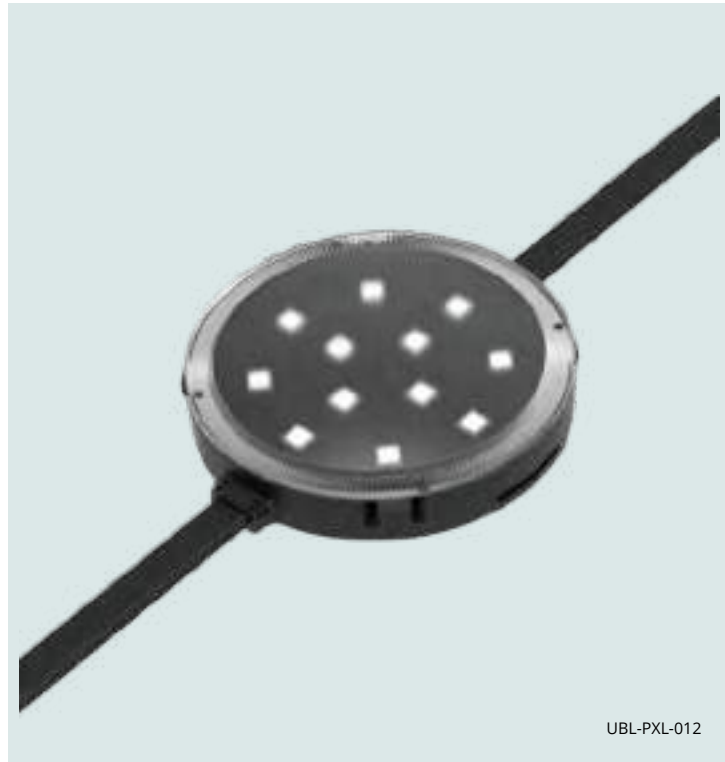

UBL-PXL-012

**KERINGI**



Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 12 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**Specifications**

Model	Wattage	A	B	C	Line Art
UBL-PXL-012	2.8 Watt	80mm	80mm	18mm	
	3.6 Watt				

**Installation Diagram Options**

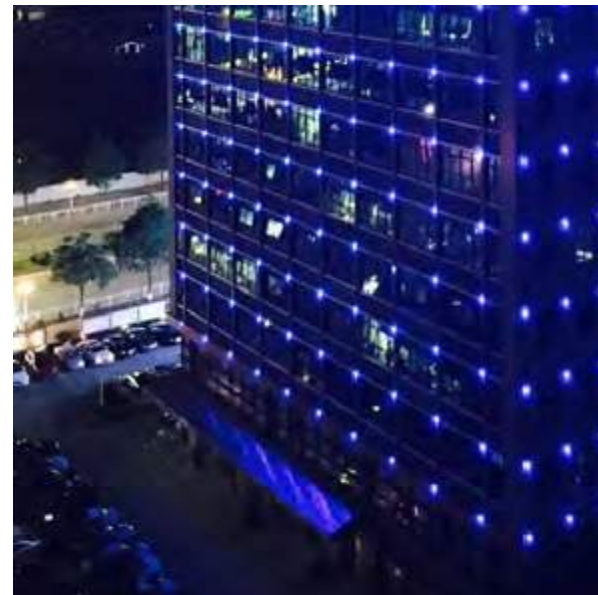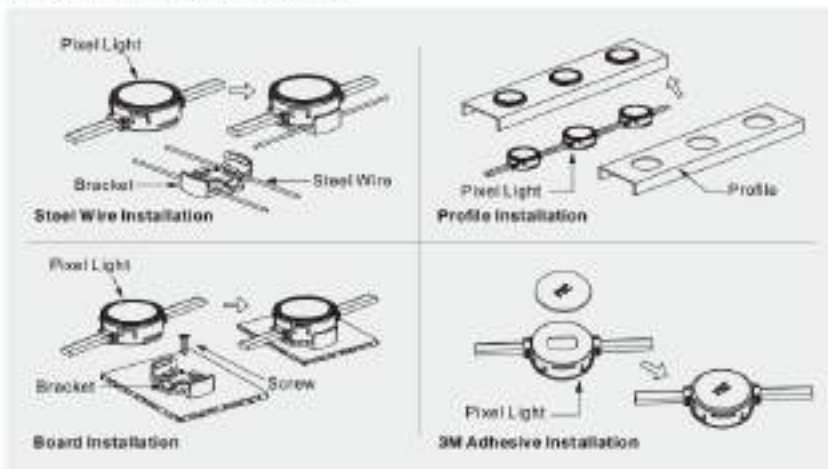

**Application**

- Large urban landscape lighting for hotels, parks.etc.
- Decorative lighting for high-rise building and bridge.



UBL-PXL-013

**KERINGI**


Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 6 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



**Specifications**

Model	Wattage	A	B	C	Line Art
UBL-PXL-013	1.2 Watt	65mm	23mm	15mm	
	1.5 Watt				

**Installation Diagram Options**

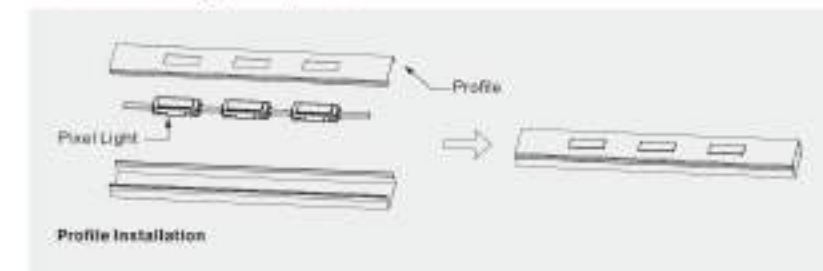

**Application**

- Large urban landscape lighting for hotels, parks.etc.
- Decorative lighting for high-rise building and bridge.



UBL-PXL-014

**KERINCI**

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 12 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



UBL-PXL-015

**KERINCI**

Housing : PC material black finish  
 Diffuser : Clear PC material  
 Input : DC24V  
 LEDs QTY : 24 Pcs  
 Seal : PU glue sealed  
 Operating Temperature : -20°C~60°C  
 LED Driver : DC24V constant voltage remote LED driver excluded  
 Power Cable : 2X0.75mm<sup>2</sup> +3X0.3mm<sup>2</sup> (Two sides)  
 PVC material 8 pcs per meter  
 Flame Resistant Grade : 94-V0  
 Lighting control : DMX512  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90




**Specifications**

Model	Wattage	A	B	C	Line Art
UBL-PXL-014	2.6 Watt	117mm	117mm	50mm	
	2.8 Watt				
	3.6 Watt				

**Specifications**

Model	Wattage	A	B	C	Line Art
UBL-PXL-015	5 Watt	117 mm	117 mm	50 mm	
	6.5 Watt				


**Installation Diagram Options**

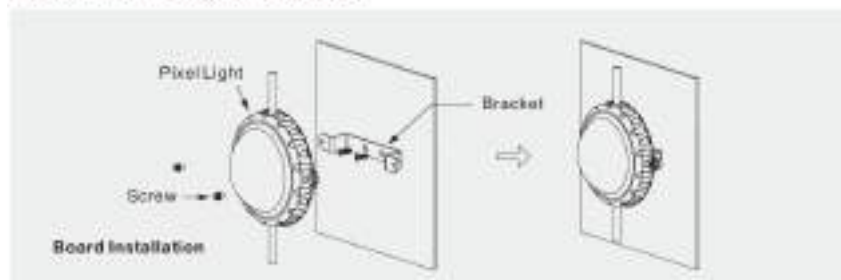

**Application**

- Large urban landscape lighting for hotels, parks.etc.
- Decorative lighting for high-rise building and bridge.

**Installation Diagram Options**

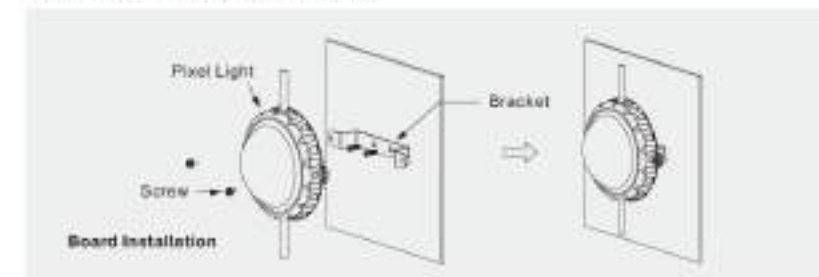

**Application**

- Large urban landscape lighting for hotels, parks.etc.
- Decorative lighting for high-rise building and bridge.



UBL-HML-001



UBL-HML-002

UBL-HML-003

UBL-HML-004

## MERBABU

Housing : Die-casting aluminum  
 Input : 220-240V 50/60Hz  
 LED : Lumileds  
 Power Factor : 0.95  
 LED Driver : Built-in  
 Power Cable : 1X1.0mm<sup>2</sup> L=0.15m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Installation



Vertical

Wall mounted

Pendant

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-HML-001	150 Watt	150lm/W	490mm	141mm	150mm	
UBL-HML-002	300 Watt			153mm	315mm	
UBL-HML-003	450 Watt			154mm	428mm	
UBL-HML-004	600 Watt			154mm	554mm	



## Application

- Port, wharf, tower crane, golf course, football stadium lighting



UBL-HML-006

UBL-HML-007

UBL-HML-005

UBL-HML-008

## MERBABU

Housing : Die-casting aluminum  
 Input : 220-240V 50/60Hz  
 LED : Lumileds  
 Power Factor : 0.95  
 LED Driver : Built-in  
 Power Cable : 1X1.0mm<sup>2</sup> L=0.15m rubber cable (High voltage)  
 Life Time : ≥80000 hours  
 CCT : - 3000K - 6500K  
 - Tunable White  
 CRI : 70 - 90



### Installation



Vertical

Wall mounted

Pendant

### Specifications

Model	Wattage	Lumen	A	B	C	Line Art
UBL-HML-005	750 Watt	150lm/w	490mm	154mm	667mm	
UBL-HML-006	900 Watt		520mm	154mm	776mm	
UBL-HML-007	1050 Watt		520mm	154mm	889mm	
UBL-HML-008	1200 Watt		530mm	154mm	1002mm	



## Application

- Port, wharf, tower crane, golf course, football stadium lighting