



Ublix®
LIGHTING PROFESSIONAL

LED STREET LIGHT

2024-2025

STREET LIGHT KONVENSIONAL STREET LIGHT SOLAR PANELS

2024-2025
.....

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang
88 Menceng, Cengkareng Jakarta Barat,
DKI Jakarta 11730
021-52395702
@ublix_lighting
www.ublix.co.id





Certificate of Brand



Certificate of SNI



Certificate of ISO 9001



Certificate of TKDN


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>





**LED STREET LIGHT
HALIMUN TYPE**

Model	UBL-LSL-AC-40W
Rated Power	40W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	6000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Aluminium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	455 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

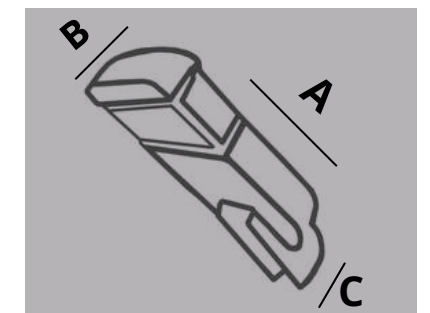

A : 455MM / B: 280MM / C: 70MM

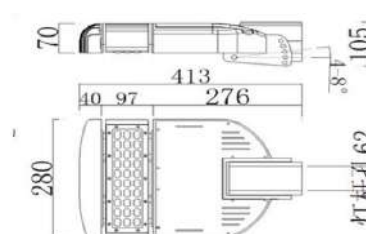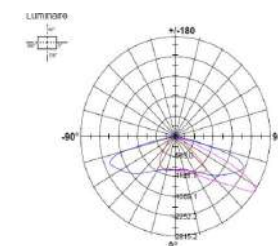


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>





LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-50W
Rated Power	50W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	7500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	455 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

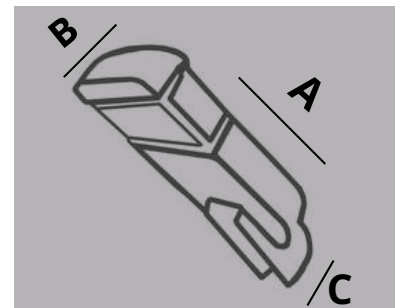

A : 455MM / B: 280MM / C: 70MM

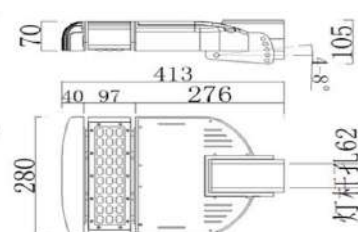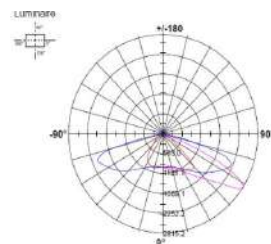



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT GALUNGGUNG TYPE

Model	UBL-AIO-100W (2IN1)
Rated Power	100W
Mono Solar Panel	18 V 200W
Battery Capacity	12V 80Ah
IP Grade	IP65
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	20
Dimension (mm)	955x370
Certificates	ISO 9001, SNI, TKDI

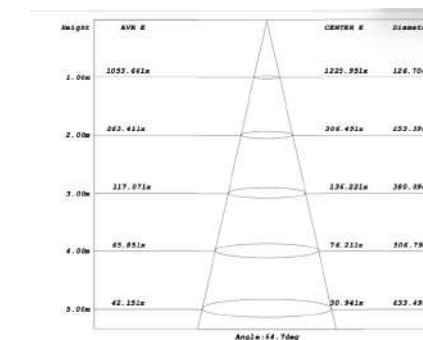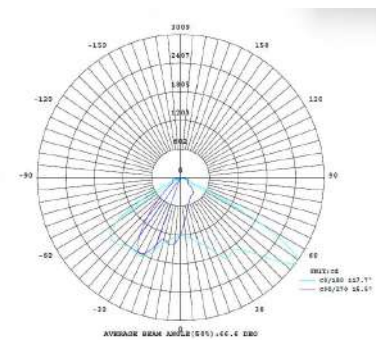



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT GALUNGGUNG TYPE

Model	UBL-AIO-80W (2IN1)
Rated Power	80W
Mono Solar Panel	18 V 150W
Battery Capacity	12V 50Ah
IP Grade	IP65
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	20
Dimension (mm)	955x370
Certificates	ISO 9001, SNI, TKDN

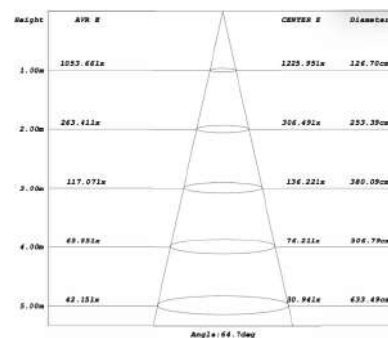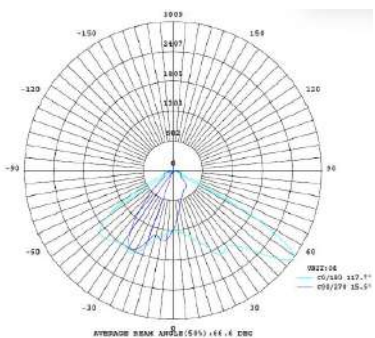


Ublix Manufaktur Indonesia
Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>





LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-60W
Rated Power	60W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	9000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Aluminium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	455 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

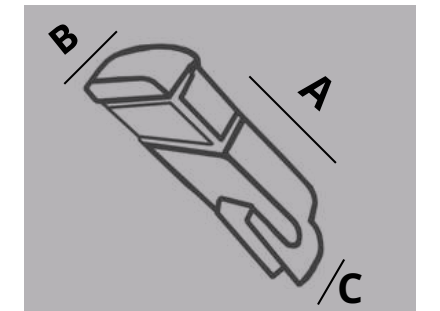

A : 455MM / B : 280MM / C : 70MM

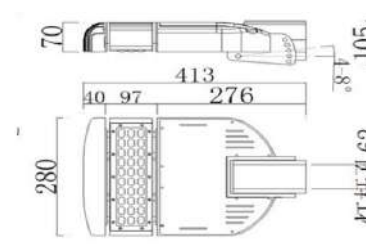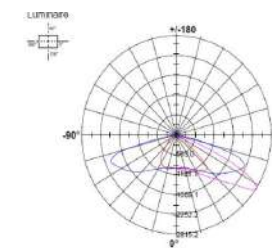


Ublix Manufaktur Indonesia
Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>





LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-70W
Rated Power	70W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	10500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	455 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

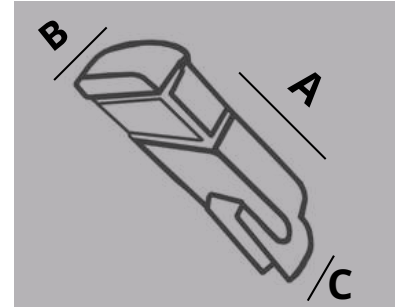

A : 455MM / B: 280MM / C: 70MM

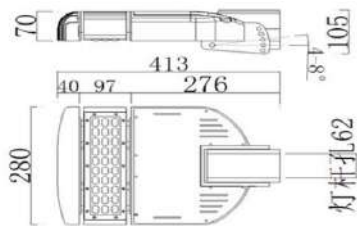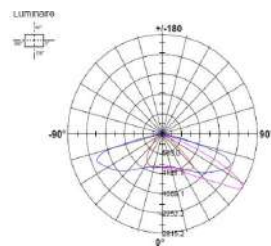



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT GALUNGGUNG TYPE

Model	UBL-AIO-60W (2IN1)
Rated Power	60W
Mono Solar Panel	18 V 120W
Battery Capacity	12V 40Ah
IP Grade	IP65
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	20
Dimension (mm)	955x370
Certificates	ISO 9001, SNI, TKDN

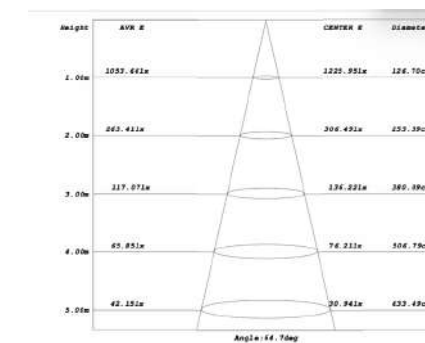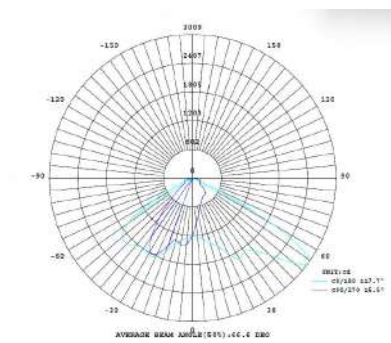


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT GALUNGGUNG TYPE

Model	UBL-AIO-40W (2IN1)
Rated Power	40W
Mono Solar Panel	18 V 100W
Battery Capacity	12V 30Ah
IP Grade	IP65
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	20
Dimension (mm)	955x370
Certificates	ISO 9001, SNI, TKDN

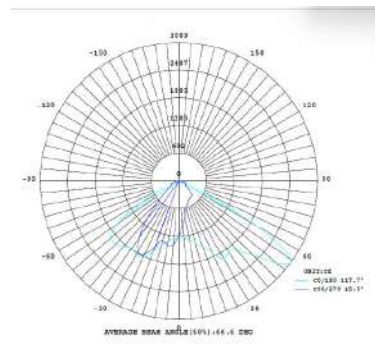

Height	Beam #	Center #	Diameter
1.00m	1000	1000	100.00mm
2.00m	200	200	200.00mm
3.00m	333	333	300.00mm
4.00m	400	400	400.00mm
5.00m	444	444	444.00mm


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>





LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-80W
Rated Power	80W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	12000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	455 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

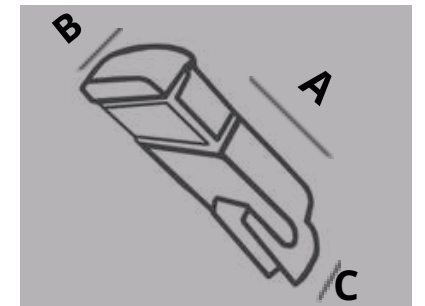

A : 455MM / B : 280MM / C : 70MM

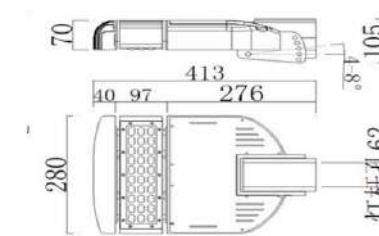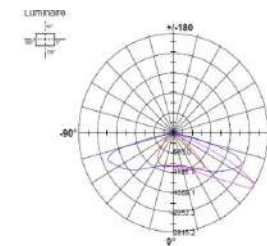


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>





LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-90W
Rated Power	90W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	13500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	497 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

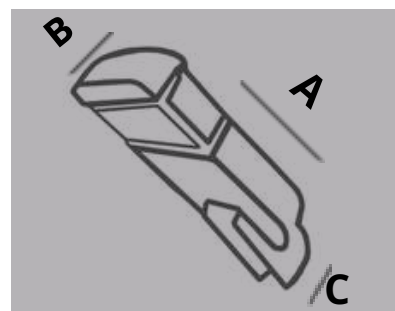

A : 455MM / B: 280MM / C: 70MM

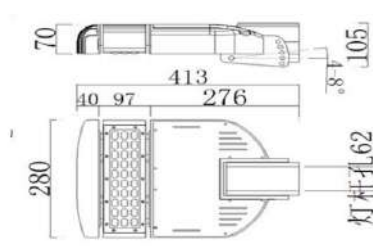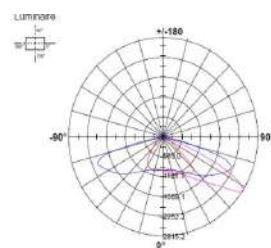


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-120W
Rated Power	120W
Mono Solar Panel	18V 120Wp
Battery Capacity	12.6 55Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	35
Dimension (mm)	1145x370
Certificates	ISO 9001, SNI, TKDN

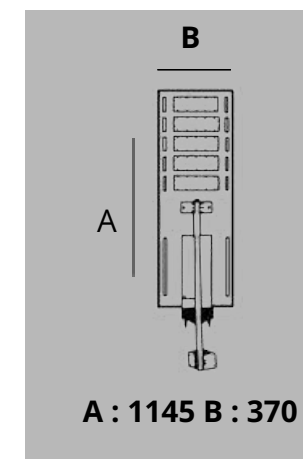

A : 1145 B : 370


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-110W
Rated Power	110W
Mono Solar Panel	18V 120Wp
Battery Capacity	12.6 55Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	35
Dimension (mm)	1145x370
Certificates	ISO 9001, SNI, TKDN


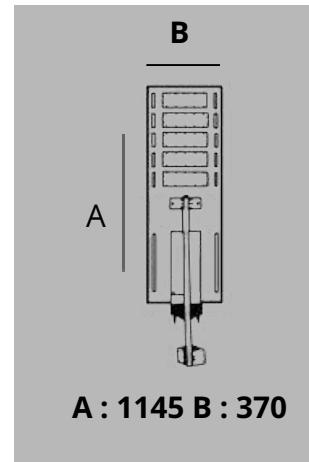


LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-100W
Rated Power	100W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	15000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	497 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

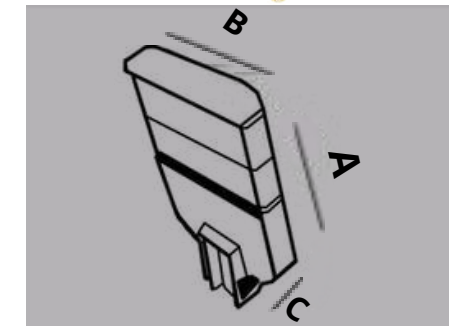

A : 497MM / B: 280MM / C: 70MM

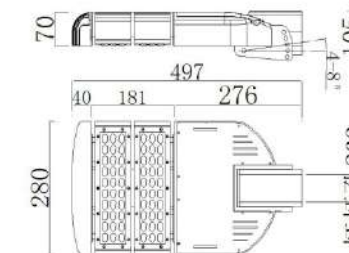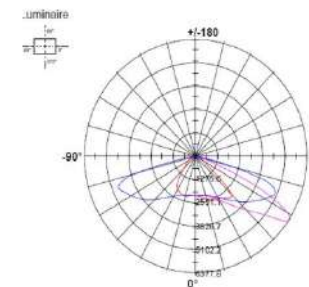

Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-110W
Rated Power	110W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	16500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	497 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

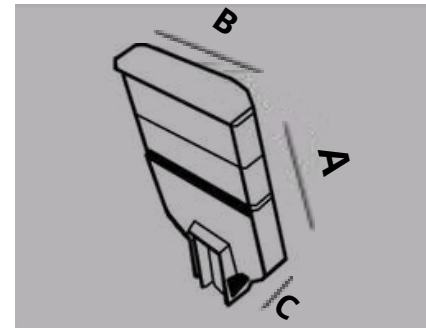


A : 497MM / B : 280MM / C : 70MM

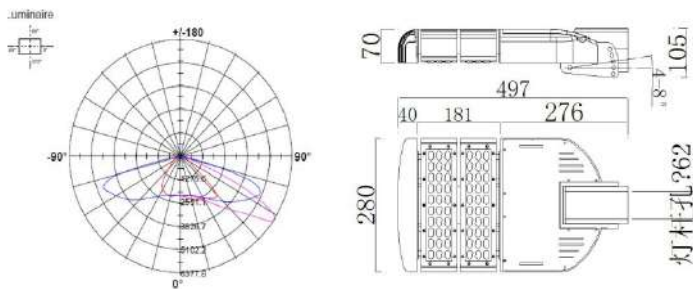

LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-100W
Rated Power	100W
Mono Solar Panel	18V 120Wp
Battery Capacity	12.6 55Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	35
Dimension (mm)	1145x370
Certificates	ISO 9001, SNI, TKDN

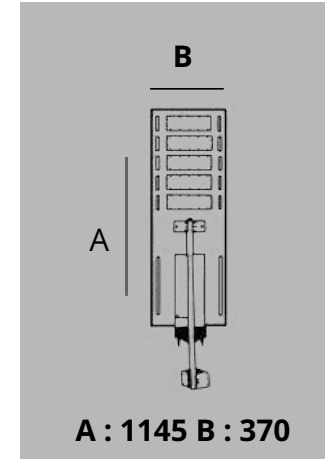

A : 1145 B : 370

Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-90W
Rated Power	90W
Mono Solar Panel	18V 120Wp
Battery Capacity	12.6 55Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	35
Dimension (mm)	1145x370
Certificates	ISO 9001, SNI, TKDN

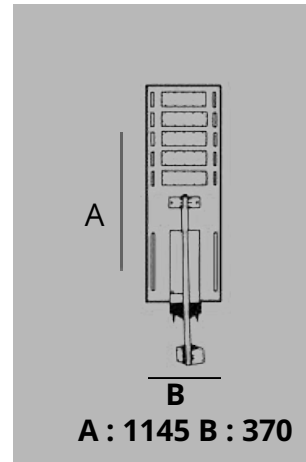


LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-120W
Rated Power	120W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	18000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	497 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

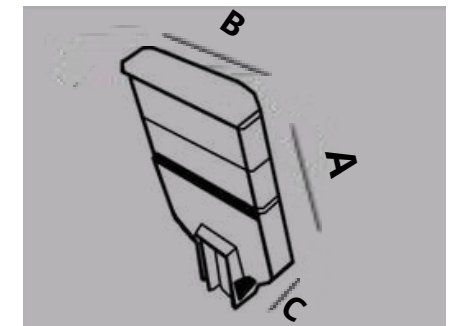

A : 497MM / B: 280MM / C: 70MM

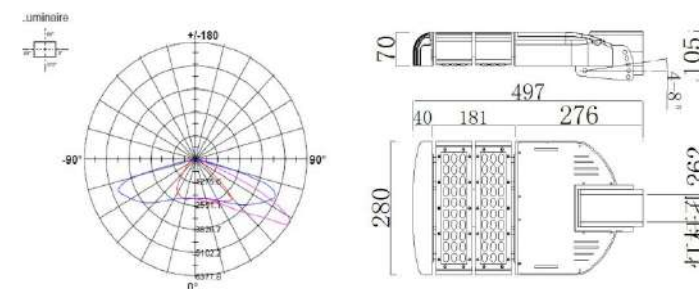

Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-130W
Rated Power	130W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	19500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	497 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

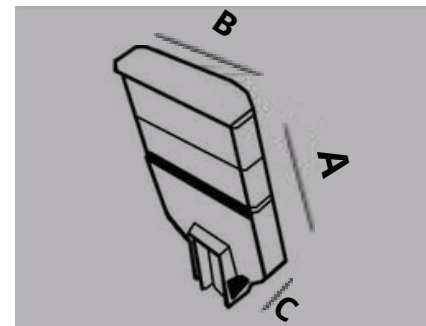

A : 497MM / B: 280MM / C: 70MM

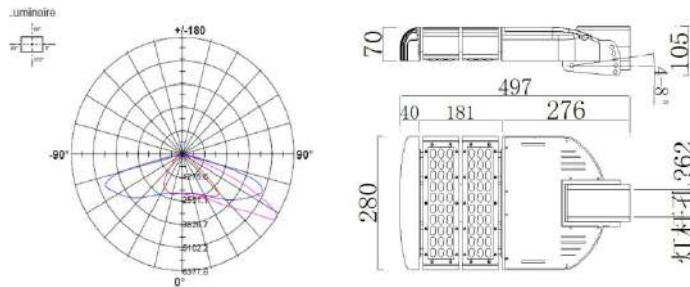


Ublx Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-80W
Rated Power	80W
Mono Solar Panel	18V 100Wp
Battery Capacity	12.6V 50Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	28
Dimension (mm)	1145x370
Certificates	ISO 9001, SNI, TKDN

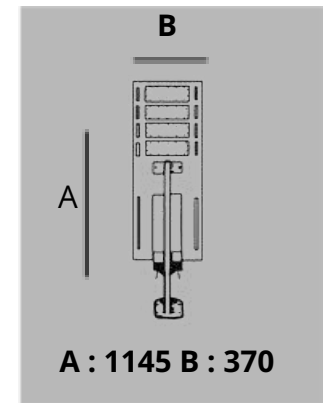

A : 1145 B : 370


Ublx Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-70W
Rated Power	70W
Mono Solar Panel	18V 100Wp
Battery Capacity	12.6V 50Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	28
Dimension (mm)	1145x370
Certificates	ISO 9001, SNI, TKDN

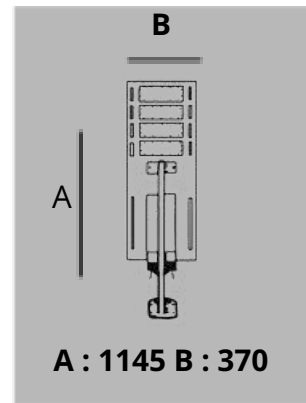


LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-140W
Rated Power	140W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	21000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	497 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

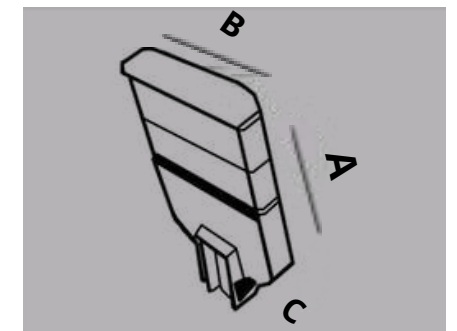

A : 497MM / B: 280MM / C: 70MM

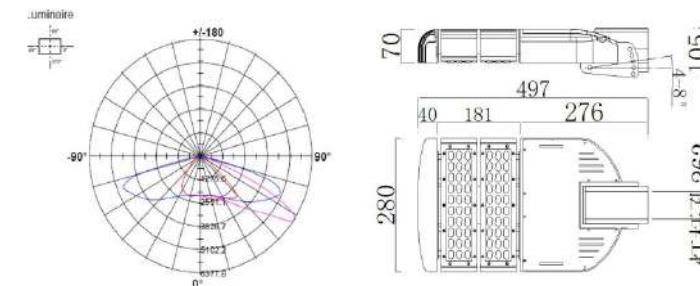

Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




LED STREET LIGHT HALIMUN TYPE

Model	UBL-LSL-AC-150W
Rated Power	150W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	22500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Net Weight	6.25 KG (One Piece)
Dimension	497 x 280 x 70MM
Certificates	ISO 9001, SNI, TKDN

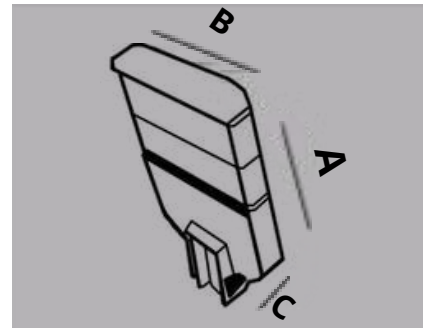

A : 497MM / B : 280MM / C : 70MM

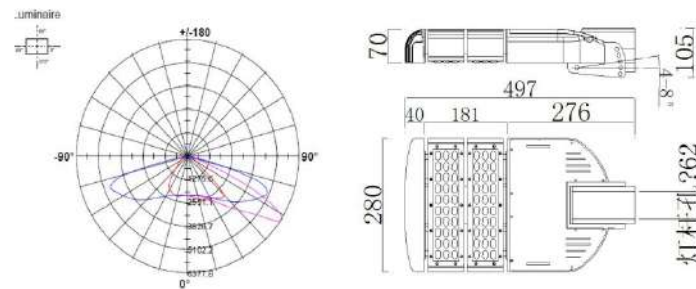


Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LI CIREMAI TYPE

Model	UBL-AIO-XXW-60W
Rated Power	60W
Mono Solar Panel	18V 45Wp
Battery Capacity	12.6V 42Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	20
Dimension (mm)	955x370
Certificates	ISO 9001, SNI, TKDN

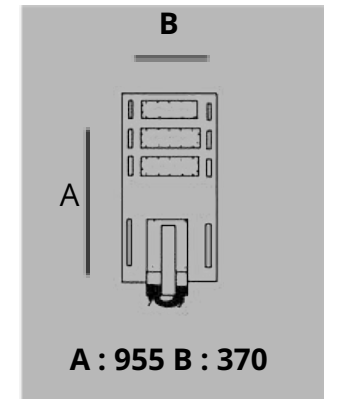

A : 955 B : 370



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-50W
Rated Power	50W
Mono Solar Panel	18V 45Wp
Battery Capacity	12.6V 42Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	20
Dimension (mm)	955x370
Certificates	ISO 9001, SNI, TKDN

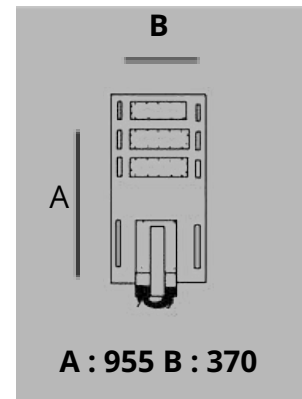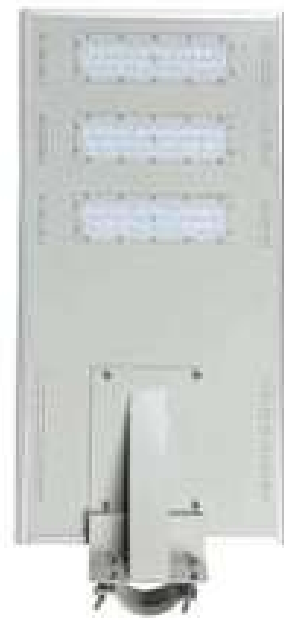

LED STREET LIGHT KANCANA TYPE

Model	UBL-LSL-AC-30W
Rated Power	30W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	4500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Dimension	456x122x77
Certificates	ISO 9001, SNI, TKDN



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




LED STREET LIGHT KANCANA TYPE

Model	UBL-LSL-AC-40W
Rated Power	40W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	6000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Dimension	456×122×77
Certificates	ISO 9001, SNI, TKDN



LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-40W
Rated Power	40W
Mono Solar Panel	16V 45Wp
Battery Capacity	12.6 22Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	15
Dimension (mm)	765x370
Certificates	ISO 9001, SNI, TKDN

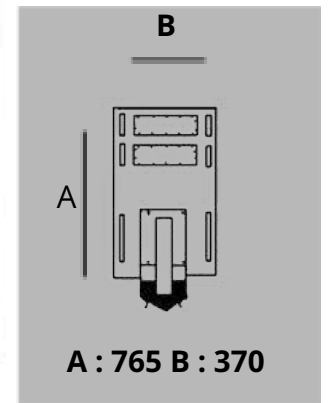

Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>




Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED SOLAR STREET LIGHT CIREMAI TYPE

Model	UBL-AIO-XXW-30W
Rated Power	30W
Mono Solar Panel	16V 45Wp
Battery Capacity	12.6 22Ah
IP Grade	IP66
Safety Regulation	SNI & TKDN
Controller	MPPT
Working Time	3-5 Rainy Day
Working Mode	Sensor or Dimming
Life Time	50000 Hours
Beam Angle	90°
CCT	5000K-6500K
CRI	>70
Lumens (lm)	>130 lm
Install Hight	6-7 M
Weight (kg)	15
Dimension (mm)	765x370
Certificates	ISO 9001, SNI, TKDN

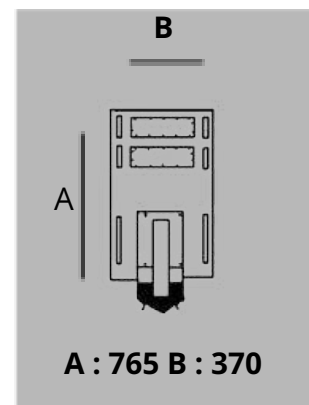

LED STREET LIGHT KANCANA TYPE

Model	UBL-LSL-AC-50W
Rated Power	50W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	7500 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Dimension	456x122x77
Certificates	ISO 9001, SNI, TKDN



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED STREET LIGHT KANCANA TYPE

Model	UBL-LSL-AC-60W
Rated Power	60W
Input Voltage	AC100-277V, 50/60HZ
PF	>0.97
IP Grade	IP66
Safety Regulation	SNI & TKDN
Surge Protection	10/20KV Version is for option
THD	8% at 230V, 50Hz
LED Chip	5050 SMD LED
Light Efficiency	150 LM/WATT
Luminous Flux	9000 LM
Color Temperature	5000K-6500K
CRI	>70
Beam Angle	90°
Body Material	Aluminium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-35°C - 60°C
Dimension	456×122×77
Certificates	ISO 9001, SNI, TKDN



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED STREET LIGHT PAPANDAYAN TYPE

Model	UBL-LSL-AC-30W
Rated Power	30W
Input Voltage	100-227V ~ 0.41A 50/60HZ
PF	>0.95
THD	8% at 230V, 50Hz
LED CHIP	3030/5050 SMD LED
IP Grade	IP65
Safety Regulation	SNI & TKDN
Light Efficiency Luminous Flux	120lm/w-130lm/W 3900 LM
Color Temperature	5000-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-25°C~55°C
Net Weight	1KG
Dimension	500mmx210mmX55mm
Certificates	ISO 9001, SNI, TKDN



LED STREET LIGHT PAPANDAYAN TYPE

Model	UBL-LSL-AC-40W
Rated Power	40W
Input Voltage	100-227V ~ 0.41A 50/60HZ
PF	>0.95
THD	8% at 230V, 50Hz
LED CHIP	3030/5050 SMD LED
IP Grade	IP65
Safety Regulation	SNI & TKDN
Light Efficiency Luminous Flux	120lm/w-130lm/W 5200 LM
Color Temperature	5000-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-25°C~55°C
Net Weight	1KG
Dimension	500mmx210mmX55mm
Certificates	ISO 9001, SNI, TKDN



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>



LED STREET LIGHT PAPANDAYAN TYPE

Model	UBL-LSL-AC-50W
Rated Power	50W
Input Voltage	100-227V ~ 0.41A 50/60HZ
PF	>0.95
THD	8% at 230V, 50Hz
LED CHIP	3030/5050 SMD LED
IP Grade	IP65
Safety Regulation	SNI & TKDN
Light Efficiency Luminous Flux	120lm/w-130lm/W 6500 LM
Color Temperature	5000-6500K
CRI	>70
Beam Angle	90°
Body Material	Alumunium
Body Color	Grey
Operating Humidity	10% - 90% RH
Operating Temperature	-25°C~55°C
Net Weight	1KG
Dimension	500mmx210mmX55mm
Certificates	ISO 9001, SNI, TKDN



Ublix Manufaktur Indonesia

Jl. Kamal Raya No.88a, RT.7/RW.3, Gudang 88
Menceng, Cengkareng Jakarta Barat, DKI Jakarta
11730
Telp : (021) 5239 5702
Website : <http://www.ublix.co.id>

